

IP20 LED Batten - Single
LED IP20 BATTEN L1800 SINGLE 4000K
0045161



- Product features**
- full range of LED Battens to replace traditional T8 battens (600mm, 1200mm, 1500mm and 1800mm), ease of installation, 24W, 3250 lum, 4000K, 25000h lifetime



PRODUCT OVERVIEW

Product name	LED IP20 BATTEN L1800 SINGLE 4000K
Technology	LED
General application	Residential & Consumer
Warranty	2 years
Fixture luminous flux (lm)	3250
Luminaire efficacy (lm/W)	135
Colour temperature (K)	4000
Light colour	Neutral White
Photobiological Risk Group	RG0
Total power consumption (W)	24
Electrical protection	Class I
IP rating	IP20
IK rating	IK02
Product EAN number	5410288451619

DATA TABLE

General data	
Product name	LED IP20 BATTEN L1800 SINGLE 4000K
Technology	LED
General application	Residential & Consumer
Performance ambient temperature Tq (°C)	25
Warranty	2 years
Optical data	
Fixture luminous flux (lm)	3250
Luminaire efficacy (lm/W)	135
Colour temperature (K)	4000
Light colour	Neutral White
Photobiological Risk Group	RG0
Electrical data	

IP20 LED Batten - Single

LED IP20 BATTEN L1800 SINGLE 4000K

0045161

Total power consumption (W)	24
Mains voltage (V)	220-240V
Electrical protection	Class I
Energy Efficiency Class (A->G) of contained light source	D, C(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	21
Max. Luminaires per 13A C Breaker	27
Max. Luminaires per 10A B Breaker	14
Max. Luminaires per 16A B Breaker	22
Max. Luminaires per 20A B Breaker	28

Lifetime data

Lifespan L70 B50	25000
------------------	-------


Physical data

IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	1800
Nominal Product Width (mm)	43
Weight (kg)	0.54

Packaging

Single packaging type	Mix blister(20% carton, 80% pl)
Product EAN number	5410288451619
Packaging single length / height (cm)	180.0
Packaging single width (cm)	4.25
Packaging single depth (cm)	4.72
Units per outer package	20
Packaging outer width (cm)	22.5
Packaging outer depth (cm)	25.5

PHOTOMETRY

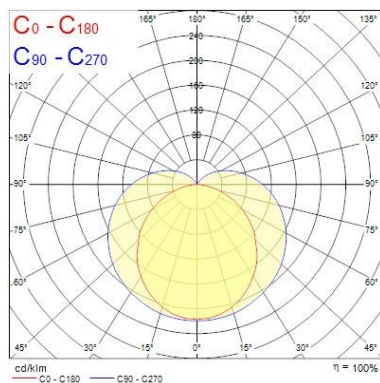

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	33.69	1.35	107.0°	2521
1.0	67.39	2.70	107.0°	706
1.5	101.08	4.05	107.0°	313
2.0	134.77	5.41	107.0°	178
2.5	168.47	6.76	107.0°	113
3.0	202.16	8.11	107.0°	78
0.5	33.69	1.35	116.6°	290
1.0	67.39	2.70	116.6°	74
1.5	101.08	4.05	116.6°	33
2.0	134.77	5.41	116.6°	19
2.5	168.47	6.76	116.6°	12
3.0	202.16	8.11	116.6°	8

IP20 LED Batten - Single

LED IP20 BATTEN L 1800 SINGLE 4000K
0045161

TECHNICAL DRAWINGS

