

SylBatten LED


SYLBATTEN LED 1205MM 3000LM 4000K EB (TP3)

0045172



Product features

- LED batten, T8 replacement, ease of installation through 2 part push-in design of the housing (safety cable included), through wiring capability (TP3 = 3 core), sheet steel, 2812LM, 26W, 108lm/W, 4000K, drive current: 350mA, CRI 80, 138° wide beam angle, electronic driver (non dimmable), IP20, IK07, 50,000 hrs (L70), (LxWxH) 1205x66x76mm, 5 step MacAdam ellipse, 3kg, white RAL9016, Class 1, 220-240V, energy class: A++, A+, A.

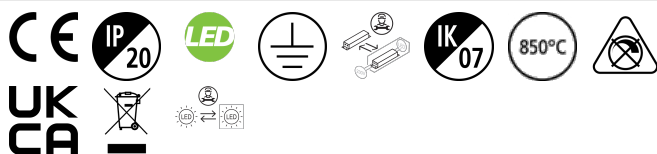

PRODUCT OVERVIEW

Product name	SYLBATTEN LED 1205MM 3000LM 4000K EB (TP3)
Technology	LED
Housing	Steel
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Logistics & Industry
E-number FI	4274239
E-number SE	7213390
Warranty	5 years
Fixture luminous flux (lm)	2812
Luminaire efficacy (lm/W)	108.15
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
Colour Variation Initial (SDCM)	SDCM5
Colour Consistency (SDCM)	5
Beam Angle (°)	138
Glare control	< 29
Photobiological Risk Group	RG0
Total power consumption (W)	26
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Built-in
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288451725

SylBatten LED

SYLBATTEN LED 1205MM 3000LM 4000K EB (TP3)

0045172

DATA TABLE

General data

Product name	SYLBATTEN LED 1205MM 3000LM 4000K EB (TP3)
Technology	LED
Housing	Steel
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	0°C...+25°C
Performance ambient temperature Tq (°C)	25
E-number FI	4274239
E-number SE	7213390
Warranty	5 years

Optical data

Fixture luminous flux (lm)	2812
Luminaire efficacy (lm/W)	108.15
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
Colour Variation Initial (SDCM)	SDCM5
Colour Consistency (SDCM)	5
Adjustable chromaticity	N
Beam Angle (°)	138
Distribution type	Symmetric
Glare control	< 29
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	26
Mains voltage (V)	220-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) = xx.x %	10
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Built-in
Transformer required	Yes
Dimmable	No
Dimming method	N/A
Inrush Current (A)	25
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50Hz
LED Flickering Rate	Medium (21% - 40%)
Max. Luminaires per 10A C Breaker	32
Max. Luminaires per 13A C Breaker	42

SylBatten LED

SYLBATTEN LED 1205MM 3000LM 4000K EB (TP3)

0045172

Lifetime data

Lifespan L70 B50	50000
Lifespan L70 B20	30000
Lifespan L70 B10	15000
Lifespan L80 B50	30000
Lifespan L80 B20	30000
Lifespan L80 B10	15000
Lifespan L90 B50	15000
Lifespan L90 B20	15000
Lifespan L90 B10	15000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1205
Nominal Product Width (mm)	66
Weight (kg)	2.546

Packaging

Single packaging type	Carton
Product EAN number	5410288451725
Packaging single length / height (cm)	124.2
Packaging single width (cm)	8.1
Packaging single depth (cm)	9.2
Units per outer package	1
Packaging outer width (cm)	8.1
Packaging outer depth (cm)	9.2

Safety data

Optimal operating condition (°C)	0-25
----------------------------------	------


PHOTOMETRY

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)	3511
0.5	1.53 1.51	E(0°)	E(C90)	E(C0)	286
1.0	3.06 3.02	E(0°)	E(C90)	E(C0)	71
1.5	4.58 4.53	E(0°)	E(C90)	E(C0)	33
2.0	6.11 6.04	E(0°)	E(C90)	E(C0)	18
2.5	7.64 7.55	E(0°)	E(C90)	E(C0)	12
3.0	9.17 9.07	E(0°)	E(C90)	E(C0)	8

Distance [m] Cone diameter [m] Illuminance [lx]



— C0 - C180 (Half beam angle: 113.0°)

— C90 - C270 (Half beam angle: 113.6°)

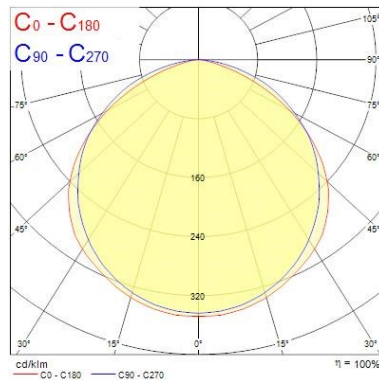

SylBatten LED

SYLBATTEN LED 1205MM 3000LM 4000K EB (TP3)
0045172

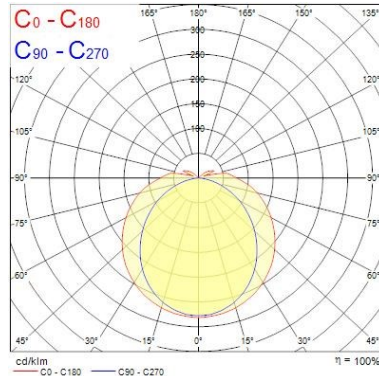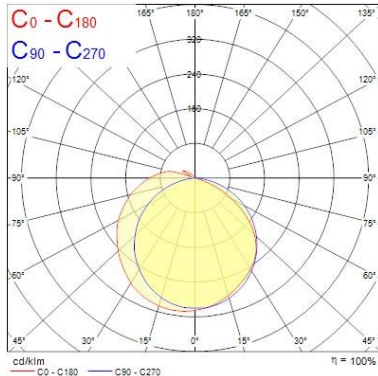

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)
0.5	1.21 2.66	3188	50.4° 408	69.4° 89
1.0	2.42 5.32	791	50.4° 101	69.4° 17
1.5	3.63 7.38	352	50.4° 45	69.4° 8
2.0	4.84 10.64	196	50.4° 25	69.4° 4
2.5	6.04 13.30	127	50.4° 16	69.4° 3
3.0	7.25 15.96	88	50.4° 11	69.4° 2

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 138.8°)
 — C90 - C270 (Half beam angle: 100.8°)

TECHNICAL DRAWINGS

