

START Downlight 225 IP44 DALI 2325Lm 830
0030338



Features

• Ceiling recessed LED downlight IP44 (from the front), with only 65mm product depth and 225mm cutout. Supplied with DALI Tridonic push dim driver with loop in - out option (2800671). Ideal replacement for 2x26W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Die-cast aluminium body, 2325LM, 23W, 101lm/W, 3000K, Driver Current: 650mA, CRI80, 74° beam angle, IP44 from the front, IK07, (HxW) 65x225mm, Class 2, 220-240V. Meets TP(a) requirements.


Product Overview

Product name	START Downlight 225 IP44 DALI 2325Lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4278167
Fixture luminous flux (lm)	2325
Luminous flux (lm)	2325
Luminaire efficacy (lm/W)	101
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	74
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	23

START Downlight 225 IP44 DALI 2325Lm 830 0030338

Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303383
Warranty	5 years
Dimming method	DALI

Photometry

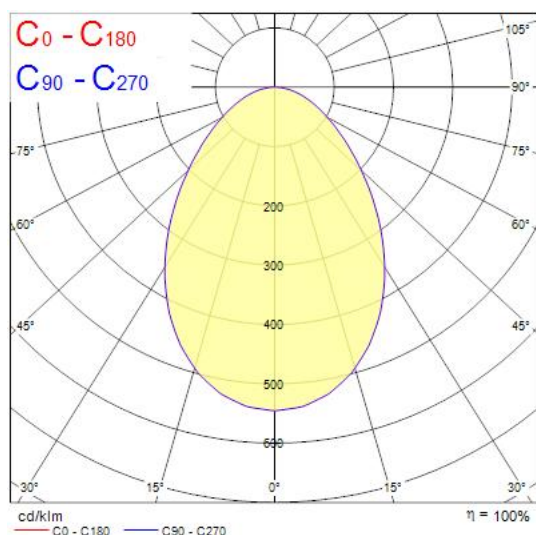

Technical drawings

