

Insaver Slim IP44 DALI 225 4800lm 830 0030540



Features

- Insaver Slim is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Dimmable DALI driver of TRIDONIC (Driver LC 45W 450-1050mA 54V o4a NF SR EXC3 875000923), 41W; 4800lm; 117lm/W; 3000K; UGR <22 with shallow product depth 65mm. Meets TP(a) requirements.


Product Overview

Product name	Insaver Slim IP44 DALI 225 4800lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4278536
Fixture luminous flux (lm)	4800
Luminaire efficacy (lm/W)	117
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Beam Angle (°)	NA
Glare control	< 22
Photobiological Risk Group	RG1
Total power consumption (W)	41
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes

Insaver Slim IP44 DALI 225 4800lm 830
0030540

Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288305400
Warranty	5 years
Colour Code	830
Dimming method	DALI

Photometry

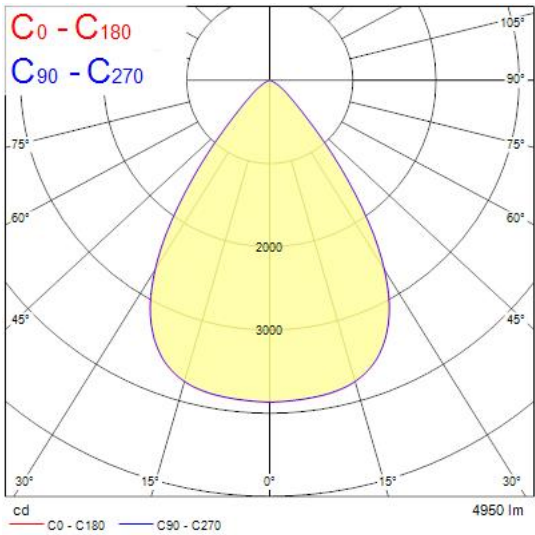

Technical drawings

