

SYLPROOF SUPERIA LED G3 1200mm S 4K DALI
0048697



Features

- Sylproof Superia, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. Polycarbonate housing, Polycarbonate diffuser, DALI dimmable, 4000K, CRI80, 3900 lm, 26 W, 150 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I,IK08, IP65.


Product Overview

Product name	SYLPROOF SUPERIA LED G3 1200mm S 4K DALI
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC000109
Fixture luminous flux (lm)	3900
Luminaire efficacy (lm/W)	150
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	100
Photobiological Risk Group	RG0
Total power consumption (W)	26
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	Grey

SYLPROOF SUPERIA LED G3 1200mm S 4K DALI 0048697

IP rating	IP65
IK rating	IK08
Product EAN number	5410288486970
Warranty	5 years
Dimming method	DALI

Photometry

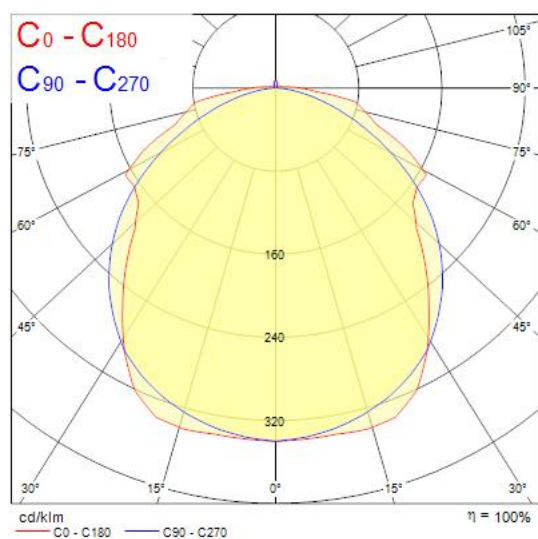

Technical drawings

