


START eco Downlight 215 Square 1400lm 840 Surface
0054115

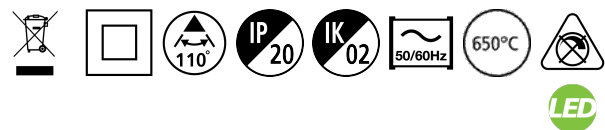

Features

- START eco Downlight is an integrated LED surface mounted downlight with built-in non dimmable driver; 15W; 1400Lm; 93Lm/W; 4000K.


Product Overview

Product name	START eco Downlight 215 Square 1400lm 840 Surface
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
General application	Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	1400
Luminaire efficacy (lm/W)	93
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	110
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	15
Electrical protection	Class II
Dimmable	No
LED Flickering Rate	Medium (21% - 40%)

START eco Downlight 215 Square 1400lm 840 Surface 0054115

Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK02
Product EAN number	5410288541150
Warranty	3 years
Dimming method	N/A

Photometry

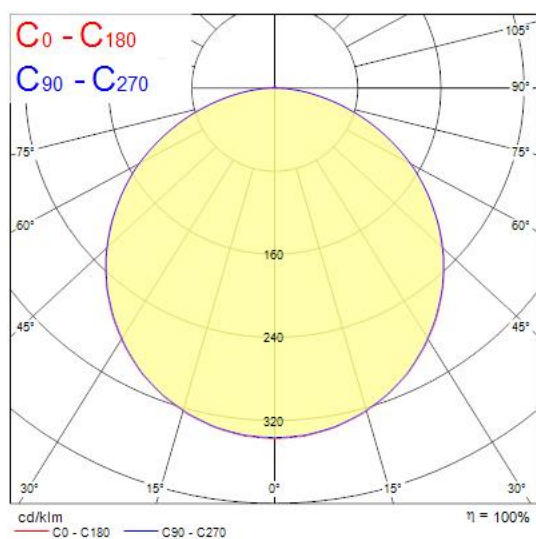

Technical drawings

