

Inverto Pend Rmt WW Eb White 3080122



Features

- Pendant luminaire with remote driver, wire to base with pluggable connection for easy installation, suitable for looping, switchable driver, white coloured aluminium housing, 1,566lm, 16W, 98lm/W, 3000K, 350mA , CRI:80, 40° beam Angle, non-dimmable, IP20, IK07, lifespan: 60,000hrs (L80:B20), 18.50x29.6x11.5mm.


Product Overview

Product name	Inverto Pend Rmt WW Eb White
Technology	LED
Housing	Aluminium
Mount	Pendant surface
Environment	Internal
General application	Hospitality
ETIM Class	EC001743
Fixture luminous flux (lm)	1566
Luminaire efficacy (lm/W)	98
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	40
Photobiological Risk Group	RG1
Total power consumption (W)	16
Electrical protection	Class II
Control gear type	Electronic ballast

Inverto Pend Rmt WW Eb White 3080122

Dimmable	No
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	8711971801221
Warranty	5 years
Dimming method	N/A

Photometry

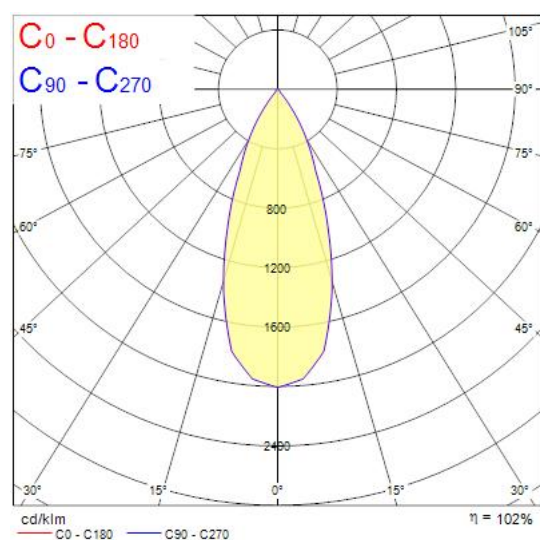

Technical drawings

