



Features

- Surface Ceiling mounted luminaire, wire to base with pluggable connection for easy installation, suitable for looping, silver coloured aluminium housing, 1,566lm, 16W, 98lm/W , 3000K, 350mA , CRI:80, 40° beam Angle, non-dimmable, IP65, IK07, lifespan: 60,000hrs (L80:B20), 110 x 110 x 162 mm.


Product Overview

Product name	Inverto Surface WW Eb Silver
Technology	LED
Housing	Aluminium
Mount	Ceiling surface mounting
Environment	Internal/External
General application	Hospitality
ETIM Class	EC002892
E-number FI	4579341
Fixture luminous flux (lm)	1566
Luminaire efficacy (lm/W)	98
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	40
Photobiological Risk Group	RG1
Total power consumption (W)	16
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	No
Housing colour	RAL9022

Inverto Surface WW Eb Silver 3081135

IP rating	IP65
IK rating	IK07
Product EAN number	8711971811350
Warranty	5 years
Dimming method	N/A

Photometry

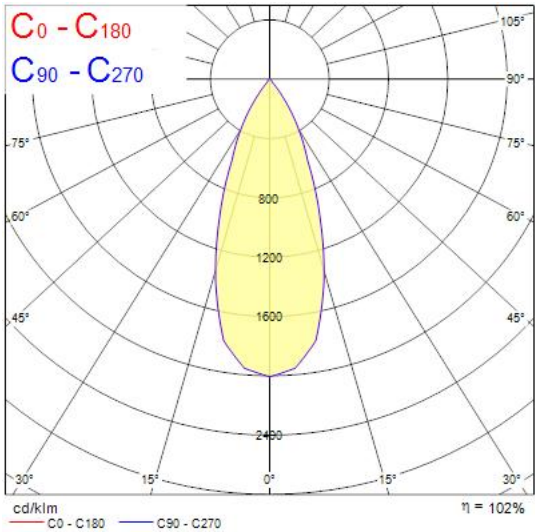

Technical drawings

