


RANA NEO Surface 1500
RANA NEO 4300LM S 1500 830 DALI EM 1L WHITE
0054254



Product features

- Surface or Suspended LED luminaire with Micro Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 1447x187x56mm, White body colour, IP20, IK07, DALI Dimmable, Emergency 3 hours, Low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 4400lm, 39W, 112lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<18, Luminance at 65° < 3000 cd/m2, Lifespan: 96,000 hours L80B20, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.

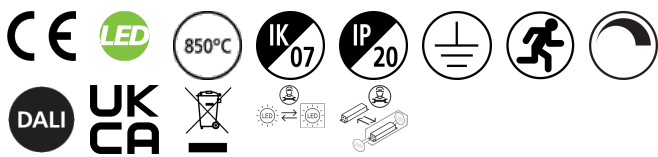

PRODUCT OVERVIEW

Product name	RANA NEO 4300LM S 1500 830 DALI EM 1L WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	4400
Luminous flux (lm)	4400
Luminaire efficacy (lm/W)	113
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 18
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80
Total power consumption (W)	39
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288542546

DATA TABLE

General data

RANA NEO Surface 1500

RANA NEO 4300LM S 1500 830 DALI EM 1L WHITE

0054254

Product name	RANA NEO 4300LM S 1500 830 DALI EM 1L WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
General application	Education, Office
Operating temperature range (°C)	0°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	4400
Luminous flux (lm)	4400
Luminaire efficacy (lm/W)	113
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 18
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80
Emergency duration (h)	3

Electrical data

Total power consumption (W)	39
Mains voltage (V)	220-240V
Lamp power factor	0.96
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	9
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Drive current (mA)	300
Inrush Current (A)	22.4
Inrush Duration (µs)	176
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C, D(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	21
Max. Luminaires per 13A C Breaker	28
Max. Luminaires per 16A C Breaker	36
Max. Luminaires per 20A C Breaker	45
Max. Luminaires per 10A B Breaker	13
Max. Luminaires per 13A B Breaker	17

RANA NEO Surface 1500

RANA NEO 4300LM S 1500 830 DALI EM 1L WHITE

0054254

Max. Luminaires per 16A B Breaker	22
Max. Luminaires per 20A B Breaker	27

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	96000


Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1440
Nominal Product Width (mm)	187
Nominal Product Height (mm)	47
Weight (kg)	4.2

Packaging

Single packaging type	Carton
Product EAN number	5410288542546
Packaging single length / height (cm)	153.5
Packaging single width (cm)	6.5
Packaging single depth (cm)	21.0
DUN14 (outer)	05410288542546
Units per outer package	1
Packaging outer length / height (cm)	153.5
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	21.0


PHOTOMETRY

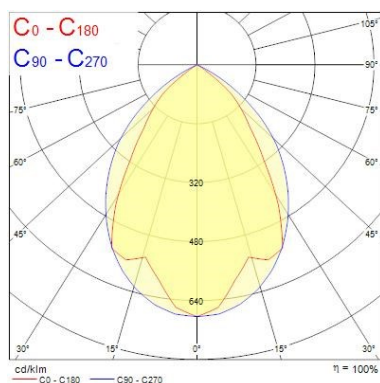

0.5	1.51	E(0°) E(C0)	56.4"	123 10
1.0	3.01	E(0°) E(C0)	56.4"	31 3
1.5	4.52	E(0°) E(C0)	56.4"	14 1
2.0	6.02	E(0°) E(C0)	56.4"	8 1
2.5	7.53	E(0°) E(C0)	56.4"	5 0
3.0	9.03	E(0°) E(C0)	56.4"	3 0

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 112.8°)

RANA NEO Surface 1500
RANA NEO 4300LM S 1500 830 DALI EM 1L WHITE
0054254

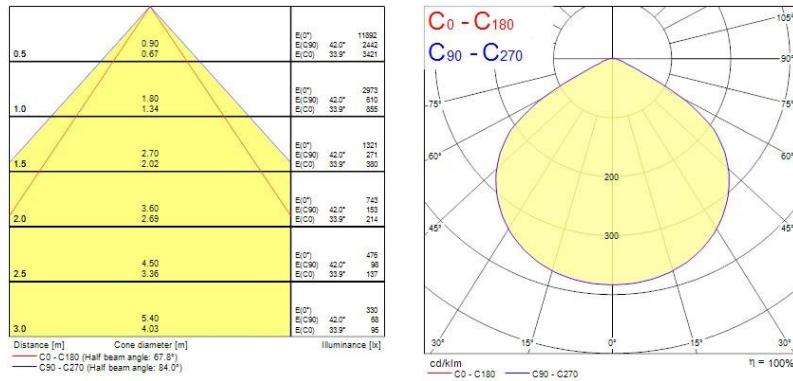

TECHNICAL DRAWINGS

