

Optix Linear Recessed 1200 SylSmart

OPTIX LINEAR RECESSED 1200 LUMI HCL TW ALU SSC

2023851



Product features

- OPTIX LINEAR RECESSED 1200 LUMI HCL TW ALU SSC is a ceiling recessed linear luminaire for office and education applications with Aluminised plastic extra low glare optics and RAL9016 colour fixture body. SylSmart Standalone controlled tunable white light engine. 2700-6200K Tunable White LED, chromaticity tolerance of 3-step MacAdam ellipse. For 2700K - Colour rendering index Ra >98; Melanopic Ratio MEER: 0.527; Fidelity Index R :97; Gamut Index R :102. For 4000K - Colour rendering index Ra >95; Melanopic Ratio MEER: 0.827; Fidelity Index R :95; Gamut Index R :101. For 6200K - Colour rendering index Ra >98; Melanopic Ratio MEER: 1.087; Fidelity Index R :96; Gamut Index R :99. For 4000K luminous flux: 2200lm. Power consumption: 27W. Luminaire efficacy: 81lm/W. UGR<16 Luminance at 65°<200 Cd/m2, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C. 68,000hrs L80B20 lifespan.



PRODUCT OVERVIEW

Product name	OPTIX LINEAR RECESSED 1200 LUMI HCL TW ALU SSC
Technology	LED LumiNature
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	2200
Luminaire efficacy (lm/W)	82
Colour temperature (K)	4000
Light colour	Tuneable White HCL
CRI (Ra)	95
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 16
Photobiological Risk Group	RG1
Total power consumption (W)	27
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSC
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768238514

Optix Linear Recessed 1200 SylSmart

OPTIX LINEAR RECESSED 1200 LUMI HCL TW ALU SSC

2023851

DATA TABLE

General data

Product name	OPTIX LINEAR RECESSED 1200 LUMI HCL TW ALU SSC
Technology	LED LumiNature
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	2200
Luminaire efficacy (lm/W)	82
Colour temperature (K)	4000
Correlated colour temperature range (K)	2800 - 6200
Light colour	Tuneable White HCL
CRI (Ra)	95
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 16
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	27
Mains voltage (V)	220-240V
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Transformer required	No
Dimmable	Yes
Dimming method	SylSmart SSC
Drive current (mA)	165
Inrush Current (A)	23
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	13
Max. Luminaires per 16A C Breaker	19

Lifetime data

Lifespan L70 B50	100000
------------------	--------

Optix Linear Recessed 1200 SylSmart

OPTIX LINEAR RECESSED 1200 LUMI HCL TW ALU SSC
2023851

Lifespan L80 B20

68000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1146
Nominal Product Width (mm)	95
Nominal Product Height (mm)	90
Weight (kg)	3.15


Packaging

Single packaging type	Carton
Product EAN number	5025768238514
Packaging single length / height (cm)	119.0
Packaging single width (cm)	10.0
Packaging single depth (cm)	11.0
DUN14 (outer)	05025768238514
Units per outer package	1
Packaging outer length / height (cm)	119.0
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	11.0

Safety data

Optimal operating condition (°C)	10-25
----------------------------------	-------

PHOTOMETRY

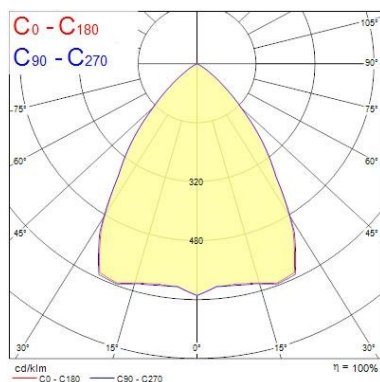

0.5	0.78	E(0°) E(C0)	37.8°	5534 1380
1.0	1.55	E(0°) E(C0)	37.8°	1384 345
1.5	2.33	E(0°) E(C0)	37.8°	615 153
2.0	3.10	E(0°) E(C0)	37.8°	346 86
2.5	3.88	E(0°) E(C0)	37.8°	221 55
3.0	4.65	E(0°) E(C0)	37.8°	154 38

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 75.6°)

TECHNICAL DRAWINGS

Optix Linear Recessed 1200 SylSmart

OPTIX LINEAR RECESSED 1200 LUMI HCL TW ALU SSC

2023851

