

Ascent 100 II Arch 160

ASCENT 100 II ARCH 1000 4K STD 160
2060545



Product features

- The ASCENT 100 II ARCH 1000 4K STD 160 is a high efficient non dimmable downlight luminaire, Colour rendering index Ra >80, Colour temperature: 4000K Neutral White, Class II, Protection rating IP40/IP20, Cut out dimensions: 178mm. Additional accessories of diffusers and plaster in available.



PRODUCT OVERVIEW

Product name	ASCENT 100 II ARCH 1000 4K STD 160
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4260850
Warranty	5 years
Fixture luminous flux (lm)	1009
Luminaire efficacy (lm/W)	144
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Beam Angle (°)	85
Glare control	< 22
Photobiological Risk Group	RG0
Total power consumption (W)	7
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Remote
Dimmable	No
Dimming method	N/A
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK02
Product EAN number	5025768605453

Ascent 100 II Arch 160

ASCENT 100 II ARCH 1000 4K STD 160
2060545

DATA TABLE

General data

Product name	ASCENT 100 II ARCH 1000 4K STD 160
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
Operating temperature range (°C)	25°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4260850
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1009
Luminaire efficacy (lm/W)	144
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Beam Angle (°)	85
Distribution type	Diffuse
Glare control	< 22
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	7
Mains voltage (V)	220-240V
Lamp power factor	0.90
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	15
Electrical protection	Class II
Control gear required	Yes
Control gear type	Electronic ballast
Control gear mounting	Remote
Transformer required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	150
Inrush Current (A)	8
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 16A C Breaker	60

Ascent 100 II Arch 160

ASCENT 100 II ARCH 1000 4K STD 160
2060545

Max. Luminaires per 10A B Breaker	38
Max. Luminaires per 16A B Breaker	60

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	58000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK02
Diffuser finish	Opal
Diffuser material	PMMA Acrylic
Reflector finish	High-gloss
Nominal Product Height (mm)	94
Nominal Product Diameter (mm)	189
Cutout Dimensions (W x L in mm or Diameter in mm)	178
Weight (kg)	1.2

Packaging


Single packaging type	Carton
Product EAN number	5025768605453
Packaging single length / height (cm)	25.0
Packaging single width (cm)	20.0
Packaging single depth (cm)	25.0
DUN14 (outer)	05025768605453
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	20.0
Packaging outer depth (cm)	25.0

Safety data

Optimal operating condition (°C)	25-25
----------------------------------	-------

PHOTOMETRY

Ascent 100 II Arch 160
ASCENT 100 II ARCH 1000 4K STD 160
2060545

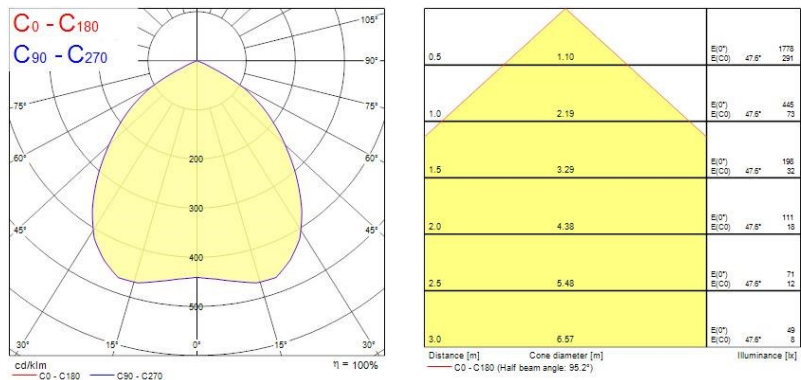

TECHNICAL DRAWINGS

