

## Colossal 900 OPAL

### COLOSSAL 900mm 840 OPAL DIR WHITE SSC

#### 2071244



#### Product features

- 900mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with polycarbonate opal diffuser. Direct light distribution, 10890lm luminous flux, 76.8W system power, 142lm/W luminaire efficacy. Sylsmart Standalone enabled. Colour rendering index Ra >80, 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40/IP20, IK03. 450mA drive current. Electrical protection Class1, 220-240V. Reported lifetime 66k hours L90B10.



### PRODUCT OVERVIEW

|                                 |                                       |
|---------------------------------|---------------------------------------|
| Product name                    | COLOSSAL 900mm 840 OPAL DIR WHITE SSC |
| Technology                      | LED (3 SDCM)                          |
| Cap/Base                        | N/A                                   |
| Housing                         | Aluminium                             |
| Mount                           | Ceiling surface mounting              |
| General application             | Hospitality, Office                   |
| ETIM Class                      | EC002892                              |
| Warranty                        | 5 years                               |
| Fixture luminous flux (lm)      | 10890                                 |
| Luminaire efficacy (lm/W)       | 142                                   |
| Colour temperature (K)          | 4000                                  |
| Colour Code                     | 840                                   |
| Light colour                    | Neutral White                         |
| CRI (Ra)                        | 80                                    |
| Colour Variation Initial (SDCM) | SDCM3                                 |
| Glare control                   | < 22                                  |
| Photobiological Risk Group      | RG0                                   |
| Total power consumption (W)     | 76.8                                  |
| Electrical protection           | Class I                               |
| Control gear type               | LED driver constant current           |
| Dimmable                        | Yes                                   |
| Dimming method                  | SylSmart SSC                          |
| LED Flickering Rate             | Ultra low (5% or less)                |
| Housing colour                  | RAL 9016 - Traffic white / Bezel      |
| IP rating                       | IP40/20                               |
| IK rating                       | IK07                                  |
| Product EAN number              | 5025768712441                         |

### DATA TABLE

#### General data

|              |                                       |
|--------------|---------------------------------------|
| Product name | COLOSSAL 900mm 840 OPAL DIR WHITE SSC |
|--------------|---------------------------------------|

## Colossal 900 OPAL

COLOSSAL 900mm 840 OPAL DIR WHITE SSC

2071244

|                                  |                          |
|----------------------------------|--------------------------|
| Technology                       | LED (3 SDCM)             |
| Cap/Base                         | N/A                      |
| Housing                          | Aluminium                |
| Mount                            | Ceiling surface mounting |
| General application              | Hospitality, Office      |
| Operating temperature range (°C) | 5°C...+25°C              |
| ETIM Class                       | EC002892                 |
| Warranty                         | 5 years                  |

### Optical data

|                                 |               |
|---------------------------------|---------------|
| Fixture luminous flux (lm)      | 10890         |
| Luminaire efficacy (lm/W)       | 142           |
| Colour temperature (K)          | 4000          |
| Colour Code                     | 840           |
| Light colour                    | Neutral White |
| CRI (Ra)                        | 80            |
| Colour Variation Initial (SDCM) | SDCM3         |
| Distribution type               | Symmetric     |
| Glare control                   | < 22          |
| Photobiological Risk Group      | RG0           |

### Electrical data

|                                                                |                             |
|----------------------------------------------------------------|-----------------------------|
| Total power consumption (W)                                    | 76.8                        |
| Current (A)                                                    | 450                         |
| Mains voltage (V)                                              | 220-240V                    |
| Lamp power factor                                              | 0.95                        |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x % | 10                          |
| Electrical protection                                          | Class I                     |
| Control gear required                                          | No                          |
| Control gear type                                              | LED driver constant current |
| Transformer required                                           | No                          |
| Dimmable                                                       | Yes                         |
| Dimming method                                                 | SylSmart SSC                |
| Drive current (mA)                                             | 450                         |
| Inrush Current (A)                                             | 25                          |
| Inrush Duration (µs)                                           | 280                         |
| Glow Wire Test (°C)                                            | 650                         |
| Energy Efficiency Class (A->G) of contained light source       | B                           |
| Nominal Frequency (Hz)                                         | 50/60Hz                     |
| LED Flickering Rate                                            | Ultra low (5% or less)      |
| Max. Luminaires per 10A C Breaker                              | 24                          |
| Max. Luminaires per 13A C Breaker                              | 31                          |
| Max. Luminaires per 16A C Breaker                              | 40                          |
| Max. Luminaires per 20A C Breaker                              | 49                          |
| Max. Luminaires per 10A B Breaker                              | 13                          |
| Max. Luminaires per 16A B Breaker                              | 24                          |
| Max. Luminaires per 20A B Breaker                              | 30                          |

## Colossal 900 OPAL

COLOSSAL 900mm 840 OPAL DIR WHITE SSC  
2071244

### Lifetime data

|                  |        |
|------------------|--------|
| Lifespan L70 B50 | 170000 |
| Lifespan L80 B20 | 145000 |
| Lifespan L90 B10 | 66000  |

### Physical data

|                               |                                  |
|-------------------------------|----------------------------------|
| Housing colour                | RAL 9016 - Traffic white / Bezel |
| IP rating                     | IP40/20                          |
| IK rating                     | IK07                             |
| Diffuser finish               | Opal                             |
| Diffuser material             | PC Polycarbonate                 |
| Nominal Product Height (mm)   | 93                               |
| Nominal Product Diameter (mm) | 888                              |
| Weight (kg)                   | 16.6                             |


### Packaging

|                                       |                |
|---------------------------------------|----------------|
| Single packaging type                 | Carton         |
| Product EAN number                    | 5025768712441  |
| Packaging single length / height (cm) | 14.0           |
| Packaging single width (cm)           | 96.0           |
| Packaging single depth (cm)           | 96.0           |
| DUN14 (outer)                         | 05025768712441 |
| Units per outer package               | 1              |
| Packaging outer length / height (cm)  | 14.0           |
| Packaging outer width (cm)            | 96.0           |
| Packaging outer depth (cm)            | 96.0           |

### Safety data

|                                  |      |
|----------------------------------|------|
| Optimal operating condition (°C) | 5-25 |
|----------------------------------|------|

## PHOTOMETRY

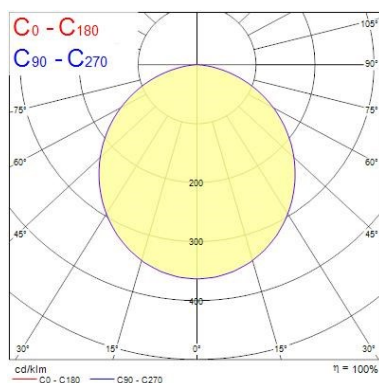

| Distance [m] | Cone diameter [m] | E (0°)<br>E (C0) | E (0°)<br>E (C0) | 1533°<br>1515 |
|--------------|-------------------|------------------|------------------|---------------|
| 0.5          | 1.42              | 54.8°            | 54.8°            | 1515          |
| 1.0          | 2.84              | 54.8°            | 54.8°            | 379           |
| 1.5          | 4.25              | 54.8°            | 54.8°            | 183           |
| 2.0          | 5.67              | 54.8°            | 54.8°            | 98            |
| 2.5          | 7.09              | 54.8°            | 54.8°            | 61            |
| 3.0          | 8.51              | 54.8°            | 54.8°            | 42            |

Distance [m]  
Cone diameter [m]  
C0 - C180 (Half beam angle: 105.6°)  
Illuminance [lx]

## TECHNICAL DRAWINGS

## Colossal 900 OPAL

*COLOSSAL 900mm 840 OPAL DIR WHITE SSC*

2071244

