

## Colossal 600 OPAL

COLOSSAL 600mm 940 OPAL DIR+HAL WHITE

2071221



### Product features

- 600mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with polycarbonate opal diffuser. Direct/indirect (halo) light distribution, 4635lm luminous flux, 40.6W system power, 114lm/W luminaire efficacy. Constant current driver. Colour rendering index Ra >90, 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40, IK03. 450mA drive current. Electrical protection Class I, 220-240V. Reported lifetime 66k hours L90B10.



### PRODUCT OVERVIEW

Product name	COLOSSAL 600mm 940 OPAL DIR+HAL WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Hospitality, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	4635
Luminous flux (lm)	4635
Luminaire efficacy (lm/W)	114
Colour temperature (K)	4000
Colour Code	940
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 22
Photobiological Risk Group	RG0
Total power consumption (W)	40.6
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5025768712212

### DATA TABLE

## Colossal 600 OPAL

COLOSSAL 600mm 940 OPAL DIR+HAL WHITE

2071221

### General data

Product name	COLOSSAL 600mm 940 OPAL DIR+HAL WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Hospitality, Office
Operating temperature range (°C)	10°C...+25°C
ETIM Class	EC002892
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	4635
Luminous flux (lm)	4635
Luminaire efficacy (lm/W)	114
Colour temperature (K)	4000
Colour Code	940
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 22
Photobiological Risk Group	RG0

### Electrical data

Total power consumption (W)	40.6
Mains voltage (V)	220-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Transformer required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	450
Inrush Current (A)	15
Inrush Duration (µs)	250
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	40
Max. Luminaires per 13A C Breaker	51
Max. Luminaires per 16A C Breaker	63
Max. Luminaires per 20A C Breaker	80
Max. Luminaires per 10A B Breaker	24
Max. Luminaires per 13A B Breaker	31

## Colossal 600 OPAL

### COLOSSAL 600mm 940 OPAL DIR+HAL WHITE

#### 2071221

Max. Luminaires per 16A B Breaker	38
Max. Luminaires per 20A B Breaker	48

#### Lifetime data

Lifespan L70 B50	170000
Lifespan L80 B20	145000
Lifespan L90 B10	66000

#### Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	93
Nominal Product Diameter (mm)	604
Weight (kg)	9.0

#### Packaging

Single packaging type	Carton
Product EAN number	5025768712212
Packaging single length / height (cm)	14.0
Packaging single width (cm)	68.0
Packaging single depth (cm)	68.0
DUN14 (outer)	05025768712212
Units per outer package	1
Packaging outer length / height (cm)	14.0
Packaging outer width (cm)	68.0
Packaging outer depth (cm)	68.0

#### Safety data


Optimal operating condition (°C)	10-25
----------------------------------	-------

## PHOTOMETRY

Distance [m]	Cone diameter [m]	E <sub>0°</sub> [lx]	E <sub>10°</sub> [lx]	E <sub>30°</sub> [lx]
0.5	1.41	6675	645	
1.0	2.82	1669	161	
1.5	4.24	742	72	
2.0	5.65	417	42	
2.5	7.06	267	26	
3.0	8.47	185	18	

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 109.4°)

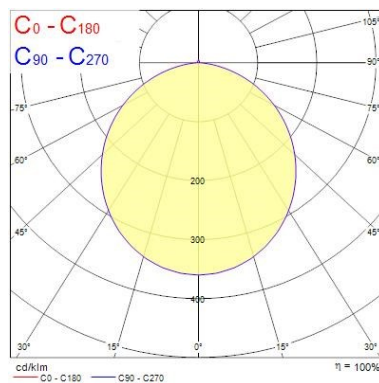

## Colossal 600 OPAL

*COLOSSAL 600mm 940 OPAL DIR+HAL WHITE*

2071221

### TECHNICAL DRAWINGS

---

