

Giotto LED 335

GIOTTO 335 3000K RECESSED 1-10V MW SENSOR

3034811



Product features

- Ambient and decorative round, recessed mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 2225lm, 18.2W, 122lm/W, 3000K, CRI 80, 1-10V dimmable, integral microwave sensor. 100,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.



PRODUCT OVERVIEW

Product name	GIOTTO 335 3000K RECESSED 1-10V MW SENSOR
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Logistics & Industry
ETIM Class	EC002892
E-number FI	4270225
Warranty	5 years
Fixture luminous flux (lm)	2225
Luminous flux (lm)	2225
Luminaire efficacy (lm/W)	122
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	23
Electrical protection	Class I
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	Yes
Dimming method	1-10V (Analogue)
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP44
IK rating	IK10
Product EAN number	8711971348115

Giotto LED 335

GIOTTO 335 3000K RECESSED 1-10V MW SENSOR

3034811

DATA TABLE

General data

Product name	GIOTTO 335 3000K RECESSED 1-10V MW SENSOR
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Logistics & Industry
Operating temperature range (°C)	-25°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4270225
Warranty	5 years

Optical data

Fixture luminous flux (lm)	2225
Luminous flux (lm)	2225
Luminaire efficacy (lm/W)	122
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	120
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	80

Electrical data

Total power consumption (W)	23
Mains voltage (V)	220-240V
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	Yes
Dimming method	1-10V (Analogue)
Drive current (mA)	600
Inrush Current (A)	5
Inrush Duration (µs)	50
Glow Wire Test (°C)	850

Giotto LED 335

GIOTTO 335 3000K RECESSED 1-10V MW SENSOR

3034811

Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	52
Max. Luminaires per 16A C Breaker	85
Max. Luminaires per 20A C Breaker	104
Max. Luminaires per 10A B Breaker	31
Max. Luminaires per 16A B Breaker	50
Max. Luminaires per 20A B Breaker	62

Lifetime data

Lifespan L70 B50	60000
Lifespan L70 B10	60000
Lifespan L80 B50	60000
Lifespan L80 B10	60000
Lifespan L90 B50	42000
Lifespan L90 B10	35000

Physical data

Housing colour	White
IP rating	IP44
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	110
Nominal Product Diameter (mm)	355
Weight (kg)	1.2
Recessed Depth (mm)	41

Packaging


Single packaging type	Carton
Product EAN number	8711971348115
Packaging single length / height (cm)	35.7
Packaging single width (cm)	35.7
Packaging single depth (cm)	10.6
DUN14 (outer)	08711971348115
Units per outer package	1
Packaging outer length / height (cm)	35.7
Packaging outer width (cm)	35.7
Packaging outer depth (cm)	10.6

Safety data

Optimal operating condition (°C)	-25-25
----------------------------------	--------

PHOTOMETRY

Giotto LED 335
GIOTTO 335 3000K RECESSED 1-10V MW SENSOR
3034811

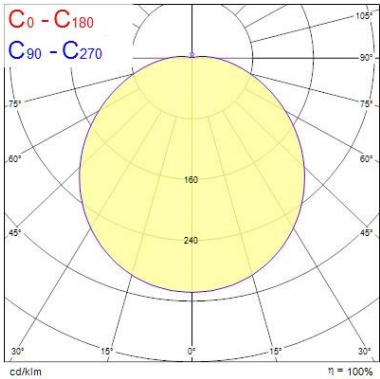

0.5	1.58	E(0°) E(C0)	2745 211
1.0	3.15	E(0°) E(C0)	686 53
1.5	4.73	E(0°) E(C0)	305 23
2.0	6.30	E(0°) E(C0)	172 13
2.5	7.88	E(0°) E(C0)	110 8
3.0	9.45	E(0°) E(C0)	76 6

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 115.2°)

TECHNICAL DRAWINGS

