


Giotto LED 305
GIOTTO 305 4000K RECESSED DALI EMERGENCY
3034790



Product features

- Ambient and decorative round, recessed mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 1750lm, 16W, 109lm/W, 4000K, CRI 80, DALI, integral 3 hour maintained emergency, 100,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.

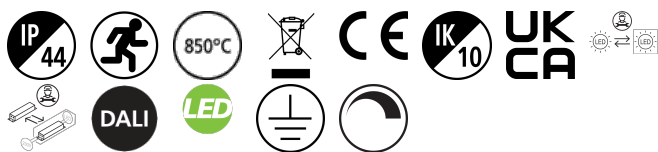

PRODUCT OVERVIEW

Product name	GIOTTO 305 4000K RECESSED DALI EMERGENCY
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Logistics & Industry
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	1750
Luminous flux (lm)	1750
Luminaire efficacy (lm/W)	109
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Glare control	< 24
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	138
Luminous flux (emergency) (lm)	138
Total power consumption (W)	20
Electrical protection	Class I
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP44
IK rating	IK10

Giotto LED 305

GIOTTO 305 4000K RECESSED DALI EMERGENCY

3034790

Product EAN number

8711971347903

DATA TABLE

General data

Product name	GIOTTO 305 4000K RECESSED DALI EMERGENCY
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Logistics & Industry
Operating temperature range (°C)	1°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1750
Luminous flux (lm)	1750
Luminaire efficacy (lm/W)	109
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	120
Distribution type	Symmetric
Glare control	< 24
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	80
Luminous flux (emergency) (lm)	138
Luminous flux (emergency) (lm)	138
Emergency duration (h)	3

Electrical data

Total power consumption (W)	20
Mains voltage (V)	220-240V
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1

Giotto LED 305

GIOTTO 305 4000K RECESSED DALI EMERGENCY

3034790

Drive current (mA)	600
Inrush Current (A)	5
Inrush Duration (µs)	50
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	52
Max. Luminaires per 16A C Breaker	85
Max. Luminaires per 20A C Breaker	104
Max. Luminaires per 10A B Breaker	31
Max. Luminaires per 16A B Breaker	50
Max. Luminaires per 20A B Breaker	62

Lifetime data

Lifespan L70 B50	60000
Lifespan L70 B10	60000
Lifespan L80 B50	60000
Lifespan L80 B10	60000
Lifespan L90 B50	40000
Lifespan L90 B10	32000

Physical data

Housing colour	White
IP rating	IP44
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	104
Nominal Product Diameter (mm)	325
Weight (kg)	1.41
Recessed Depth (mm)	41

Packaging


Single packaging type	Carton
Product EAN number	8711971347903
Packaging single length / height (cm)	32.5
Packaging single width (cm)	32.5
Packaging single depth (cm)	10.0
DUN14 (outer)	08711971347903
Units per outer package	1
Packaging outer length / height (cm)	32.5
Packaging outer width (cm)	32.5
Packaging outer depth (cm)	10.0

Safety data

Optimal operating condition (°C)	1-25
----------------------------------	------

Giotto LED 305
GIOTTO 305 4000K RECESSED DALI EMERGENCY
3034790

PHOTOMETRY

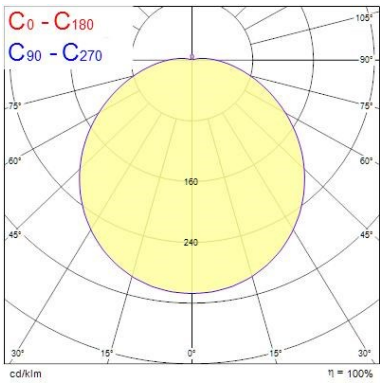


Distance [m]	Cone diameter [m]	Beam angle [°]	Beam angle [°]	Illuminance [lx]
0.5	1.58	57.7°	57.7°	2182
1.0	3.16	57.7°	57.7°	538
1.5	4.75	57.7°	57.7°	239
2.0	6.33	57.7°	57.7°	134
2.5	7.91	57.7°	57.7°	86
3.0	9.49	57.7°	57.7°	60

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 115.4°)

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam angle [°]	Illuminance [lx]
0.5	1.60	58.0°	58.0°	171
1.0	3.20	58.0°	58.0°	43
1.5	4.80	58.0°	58.0°	19
2.0	6.40	58.0°	58.0°	11
2.5	8.00	58.0°	58.0°	7
3.0	9.60	58.0°	58.0°	5

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 116.0°)

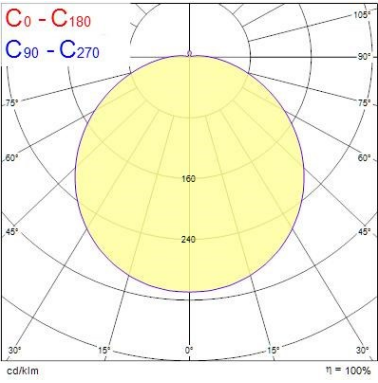

TECHNICAL DRAWINGS

