

## Colossal 400 OPAL

COLOSSAL 400mm HO 840 OPAL DIR WHITE DALI

2071331



### Product features

- 400mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with polycarbonate opal diffuser. Direct light distribution, 3435lm luminous flux, 27W system power, 127lm/W luminaire efficacy. DALI dimmable. Colour rendering index Ra >80, 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40, IK03. 600mA drive current. Electrical protection Class1, 220-240V. Reported lifetime 66k hours L90B10.



### PRODUCT OVERVIEW

|                                 |   |
|---------------------------------|---|
| Product name                    | COLOSSAL 400mm HO 840 OPAL DIR WHITE DALI |
| Technology                      | LED (3 SDCM)                              |
| Cap/Base                        | N/A                                       |
| Housing                         | Aluminium                                 |
| Mount                           | Ceiling surface mounting, Suspended       |
| General application             | Hospitality, Office                       |
| ETIM Class                      | EC002892                                  |
| Warranty                        | 5 years                                   |
| Fixture luminous flux (lm)      | 3435                                      |
| Luminaire efficacy (lm/W)       | 127                                       |
| Colour temperature (K)          | 4000                                      |
| Colour Code                     | 840                                       |
| Light colour                    | Neutral White                             |
| CRI (Ra)                        | 80  |
| Colour Variation Initial (SDCM) | SDCM3                                     |
| Glare control                   | < 24                                      |
| Photobiological Risk Group      | RG0                                       |
| Total power consumption (W)     | 27  |
| Electrical protection           | Class I                                   |
| Control gear type               | LED driver constant current               |
| Dimmable                        | Yes                                       |
| Dimming method                  | DALI-2                                    |
| LED Flickering Rate             | Ultra low (5% or less)                    |
| Housing colour                  | RAL 9016 - Traffic white / Bezel          |
| IP rating                       | IP40/20                                   |
| IK rating                       | IK07                                      |
| Product EAN number              | 5025768713318                             |

### DATA TABLE

#### General data

|              |   |
|--------------|---|
| Product name | COLOSSAL 400mm HO 840 OPAL DIR WHITE DALI |
|--------------|---|

## Colossal 400 OPAL

COLOSSAL 400mm HO 840 OPAL DIR WHITE DALI  
2071331

|                                  |                                     |
|----------------------------------|-------------------------------------|
| Technology                       | LED (3 SDCM)                        |
| Cap/Base                         | N/A                                 |
| Housing                          | Aluminium                           |
| Mount                            | Ceiling surface mounting, Suspended |
| General application              | Hospitality, Office                 |
| Operating temperature range (°C) | 10°C...+25°C                        |
| ETIM Class                       | EC002892                            |
| Warranty                         | 5 years                             |

### Optical data

|                                 |               |
|---------------------------------|---------------|
| Fixture luminous flux (lm)      | 3435          |
| Luminaire efficacy (lm/W)       | 127           |
| Colour temperature (K)          | 4000          |
| Colour Code                     | 840           |
| Light colour                    | Neutral White |
| CRI (Ra)                        | 80            |
| Colour Variation Initial (SDCM) | SDCM3         |
| Distribution type               | Symmetric     |
| Glare control                   | < 24          |
| Photobiological Risk Group      | RG0           |

### Electrical data

|  |                             |
|--|-----------------------------|
| Total power consumption (W)                                    | 27                          |
| Mains voltage (V)  | 220-240V                    |
| Lamp power factor  | 0.95                        |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x % | 10                          |
| Electrical protection  | Class I                     |
| Control gear required  | No                          |
| Control gear type  | LED driver constant current |
| Transformer required   | No                          |
| Dimmable   | Yes                         |
| Dimming method   | DALI-2                      |
| Drive current (mA)   | 600                         |
| Inrush Current (A)   | 20                          |
| Inrush Duration (µs)   | 200                         |
| Glow Wire Test (°C)  | 650                         |
| Energy Efficiency Class (A->G) of contained light source       | B                           |
| Nominal Frequency (Hz)   | 50/60Hz                     |
| LED Flickering Rate  | Ultra low (5% or less)      |
| Max. Luminaires per 10A C Breaker                              | 31                          |
| Max. Luminaires per 13A C Breaker                              | 39                          |
| Max. Luminaires per 16A C Breaker                              | 51                          |
| Max. Luminaires per 20A C Breaker                              | 62                          |
| Max. Luminaires per 10A B Breaker                              | 18                          |
| Max. Luminaires per 16A B Breaker                              | 30                          |
| Max. Luminaires per 20A B Breaker                              | 37                          |

## Colossal 400 OPAL

COLOSSAL 400mm HO 840 OPAL DIR WHITE DALI  
2071331

### Lifetime data

|                  |        |
|------------------|--------|
| Lifespan L70 B50 | 170000 |
| Lifespan L80 B20 | 145000 |
| Lifespan L90 B10 | 66000  |

### Physical data

|                               |                                  |
|-------------------------------|----------------------------------|
| Housing colour                | RAL 9016 - Traffic white / Bezel |
| IP rating                     | IP40/20                          |
| IK rating                     | IK07                             |
| Diffuser finish               | Opal                             |
| Diffuser material             | PC Polycarbonate                 |
| Nominal Product Height (mm)   | 93                               |
| Nominal Product Diameter (mm) | 400                              |
| Weight (kg)                   | 6.5                              |



### Packaging

|                                       |                |
|---------------------------------------|----------------|
| Single packaging type                 | Carton         |
| Product EAN number                    | 5025768713318  |
| Packaging single length / height (cm) | 14.0           |
| Packaging single width (cm)           | 47.0           |
| Packaging single depth (cm)           | 47.0           |
| DUN14 (outer)                         | 05025768713318 |
| Units per outer package               | 1              |
| Packaging outer length / height (cm)  | 14.0           |
| Packaging outer width (cm)            | 47.0           |
| Packaging outer depth (cm)            | 47.0           |

### Safety data

|                                  |       |
|----------------------------------|-------|
| Optimal operating condition (°C) | 10-25 |
|----------------------------------|-------|

## PHOTOMETRY

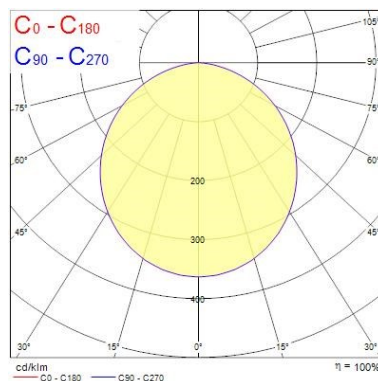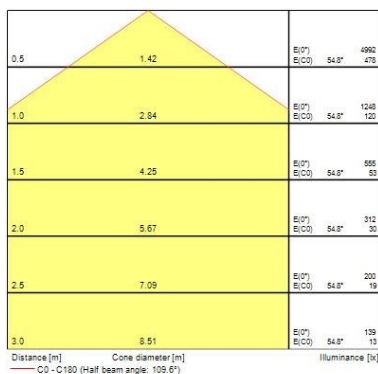

## TECHNICAL DRAWINGS

## Colossal 400 OPAL

*COLOSSAL 400mm HO 840 OPAL DIR WHITE DALI*

2071331

