

Obico 80
OBICO IP65 740LM 2CCT DIM ADJ WHT
0005350



Product features

- Integrated LED recessed spotlight, 2-axis adjustable (horizontal rotation 360°, vertical tilt 30°)
RAL9016 white bezel colour, two temperature light colors selectable: 3000K, 4000K. Lumen output 740lm (4000K), 8.5W, dimmable trailing/leading edge, 38° degree beam angle, aluminium and steel body, low profile 40mm recessed depth, IP65 frontal degree, IK03, loop-in/loop-out terminals for fast wiring, 96mm bezel diameter, 80mm cutout, clear lens.




PRODUCT OVERVIEW

Product name	OBICO IP65 740LM 2CCT DIM ADJ WHT
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality
ETIM Class	EC001744
E-number FI	4278283
Warranty	5 years
Fixture luminous flux (lm)	740
Luminaire efficacy (lm/W)	87
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	38
Photobiological Risk Group	RG1
Total power consumption (W)	8.5
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Housing colour	White
IP rating	IP65/20
IK rating	IK03
Product EAN number	5410288053509

PHOTOMETRY

Obico 80
OBICO IP65 740LM 2CCT DIM ADJ WHT
0005350

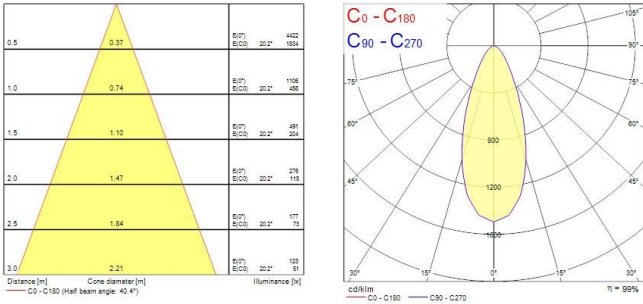

TECHNICAL DRAWINGS

