

## Start Spot IP44 3-CCT


*Start Spot 550lm 3CCT DIM IP44 WH*

0005509



### Product features

- Integrated LED recessed spotlight, vertical tilt 30°, phase dimmable, 3 CCT 2700K-3000K-4000K, 38° degree beam angle, polycarbonate white body, IP44 from the front, IK03, loop-in/loop-out terminals for fast wiring, 87mm bezel diameter, 68-74mm cutout, clear lens. Additional silver or black bezel can be ordered as accessory.






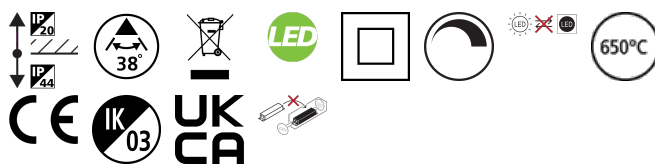


### PRODUCT OVERVIEW

Product name	Start Spot 550lm 3CCT DIM IP44 WH
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
General application	Hospitality, Residential & Consumer, Retail
ETIM Class	EC001744
E-number FI	4278483
Warranty	3 years
Fixture luminous flux (lm)	550
Luminous flux (lm)	550
Luminaire efficacy (lm/W)	100
Colour temperature (K)	3000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	38
Photobiological Risk Group	RG1
Total power consumption (W)	5.5
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK03
Product EAN number	5410288055091

### PHOTOMETRY

Start Spot IP44 3-CCT  
Start Spot 550lm 3CCT DIM IP44 WH  
0005509

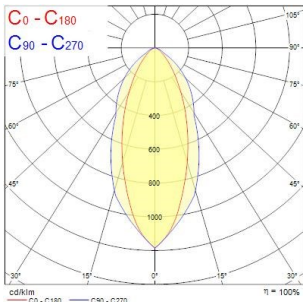

TECHNICAL DRAWINGS

