

Start Spot IP65  
START ECO SPOT 540lm 830 IP65 WHT  
0005373



Product features

- Integrated LED recessed spotlight, fixed, 540lm, 6.5W, non-dimmable, 3000K, 100° degree beam angle, polycarbonate white body, low profile 47mm recessed depth, IP65 from the front, IK03, loop-in/loop-out terminals for fast wiring, 86mm bezel diameter, 68-74mm cutout, frosted lens. Additional silver bezel included in the packaging.




PRODUCT OVERVIEW

|                                 |                                   |
|---------------------------------|-----------------------------------|
| Product name                    | START ECO SPOT 540lm 830 IP65 WHT |
| Technology                      | LED                               |
| Housing                         | PC Polycarbonate                  |
| Mount                           | Ceiling recessed mounting         |
| Environment                     | Indoor                            |
| General application             | Residential & Consumer            |
| ETIM Class                      | EC001744                          |
| Warranty                        | 3 years                           |
| Fixture luminous flux (lm)      | 540                               |
| Luminaire efficacy (lm/W)       | 83                                |
| Colour temperature (K)          | 3000                              |
| Colour Code                     | 830                               |
| Light colour                    | Warm White                        |
| CRI (Ra)                        | 80                                |
| Colour Variation Initial (SDCM) | SDCM6                             |
| Beam Angle (°)                  | 100                               |
| Photobiological Risk Group      | RG0                               |
| Total power consumption (W)     | 6.5                               |
| Electrical protection           | Class II                          |
| Dimmable                        | No                                |
| Dimming method                  | N/A                               |
| Minimum dimming level (%)       | 10                                |
| LED Flickering Rate             | Medium (21% - 40%)                |
| Housing colour                  | White                             |
| IP rating                       | IP65/20                           |
| IK rating                       | IK03                              |
| Product EAN number              | 5410288053738                     |

PHOTOMETRY

Start Spot IP65  
START ECO SPOT 540lm 830 IP65 WHT  
0005373

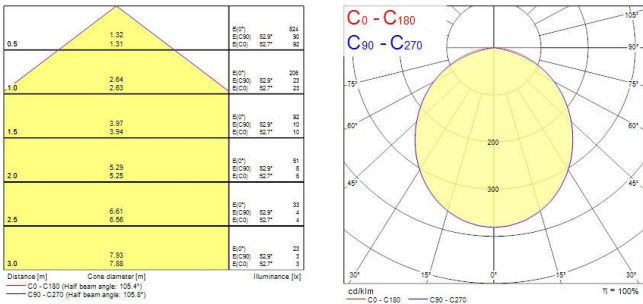

TECHNICAL DRAWINGS

