

INSAVER SLIM 175 PIR / WIDE BEZEL


Insaver Slim UGR19 IP44 175 1150lm 830 PIR

0030518



Product features

- Insaver Slim is a ceiling recessed LED downlight (IP44 from the front), with integrated PIR sensor with time ( up to 8 mins ) and daylight lux level settings. Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 9.5W; 1150lm; 121lm/W; 3000K; UGR <19 with shallow product depth 50mm. Meets TP(a) requirements.

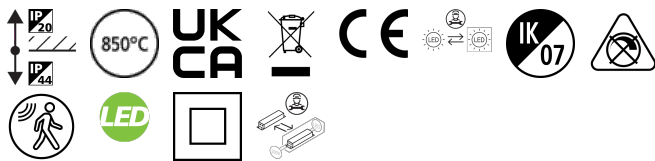


PRODUCT OVERVIEW

|                                 |                                            |
|---------------------------------|--------------------------------------------|
| Product name                    | Insaver Slim UGR19 IP44 175 1150lm 830 PIR |
| Technology                      | LED                                        |
| Cap/Base                        | N/A                                        |
| Housing                         | Aluminium                                  |
| Mount                           | Ceiling recessed mounting                  |
| General application             | Hospitality, Office, Retail                |
| ETIM Class                      | EC001744                                   |
| E-number FI                     | 4278517                                    |
| Warranty                        | 5 years                                    |
| Fixture luminous flux (lm)      | 1150                                       |
| Luminaire efficacy (lm/W)       | 121                                        |
| Colour temperature (K)          | 3000                                       |
| Light colour                    | Warm White                                 |
| CRI (Ra)                        | 80                                         |
| Colour Variation Initial (SDCM) | SDCM3                                      |
| Beam Angle (°)                  | 70                                         |
| Glare control                   | < 19                                       |
| Photobiological Risk Group      | RG1                                        |
| Total power consumption (W)     | 9.5                                        |
| Electrical protection           | Class II                                   |
| Control gear type               | LED driver constant current                |
| Dimmable                        | No                                         |
| Dimming method                  | N/A                                        |
| LED Flickering Rate             | Ultra low (5% or less)                     |
| Housing colour                  | RAL 9003 - Signal white                    |
| IP rating                       | IP44/20                                    |
| IK rating                       | IK07                                       |
| Product EAN number              | 5410288305189                              |

PHOTOMETRY

INSAVER SLIM 175 PIR / WIDE BEZEL  
Insaver Slim UGR19 IP44 175 1150lm 830 PIR  
0030518

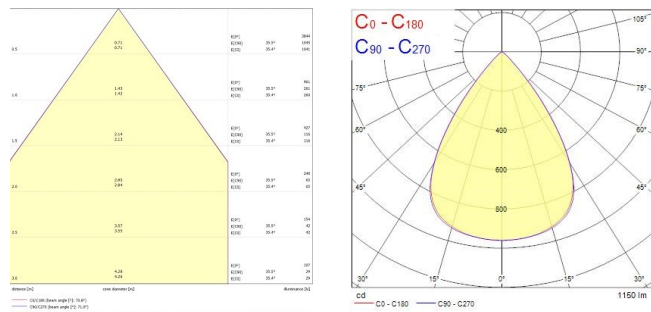

TECHNICAL DRAWINGS

