

INSAVER SLIM SQUARE 200

Insaver Slim Square UGR19 200 IP44 2250lm 830

0030314

Product features

- Insaver Slim is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 20W; 2250lm; 113lm/W; 3000K; UGR <19 with shallow product depth 65mm. Meets TP(a) requirements.



PRODUCT OVERVIEW


Product name	Insaver Slim Square UGR19 200 IP44 2250lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4276929
Warranty	5 years
Fixture luminous flux (lm)	2250
Luminaire efficacy (lm/W)	113
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	57
Beam Angle (°)	NA
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303147

PHOTOMETRY

INSAVER SLIM SQUARE 200

Insaver Slim Square UGR19 200 IP44 2250lm 830

0030314

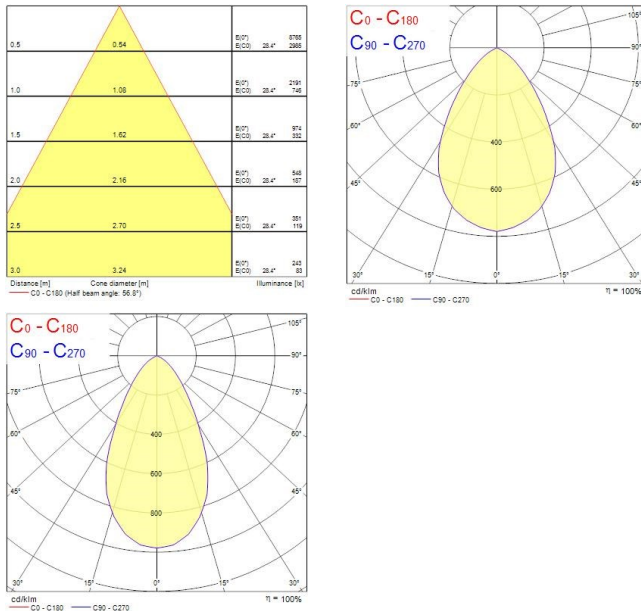

TECHNICAL DRAWINGS

