

## Isoline


ISOLINE 3380MM 4K ASYL 5C

0042539



### Product features

- Isoline LED linear luminaire for industrial and commercial applications. 3380 mm length with asymmetrical (Left) optics provide homogenous light distribution for wide, shelf areas. Aluminium housing, RAL 9016. Max + 35 °C operating temperature range, 4000 K, CRI 80, 3 SDCM. 114 W power consumption, 16000 lm luminous flux, 140 lm/W efficacy, 3380 mm x 62 mm x 59 mm (L x W x H) dimensions, IP20, IK03, 220-240 V 50/60 Hz, Class I. Lifespan L70:B50 60,000 hours.

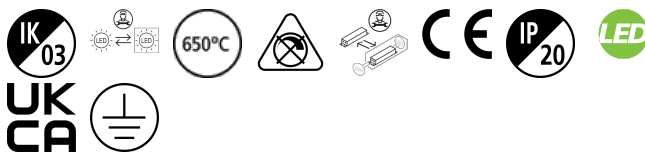

### PRODUCT OVERVIEW


|                                 |                                  |
|---------------------------------|----------------------------------|
| Product name                    | ISOLINE 3380MM 4K ASYL 5C        |
| Technology                      | LED                              |
| Cap/Base                        | N/A                              |
| Housing                         | Aluminium                        |
| Mount                           | Suspended                        |
| Fixture rating                  | Enclosed                         |
| General application             | Logistics & Industry             |
| ETIM Class                      | EC000986                         |
| Warranty                        | 5 years                          |
| Fixture luminous flux (lm)      | 16000                            |
| Luminous flux (lm)              | 16000                            |
| Luminaire efficacy (lm/W)       | 140                              |
| Colour temperature (K)          | 4000                             |
| Colour Code                     | 840                              |
| CRI (Ra)                        | 80                               |
| Colour Variation Initial (SDCM) | SDCM3                            |
| Photobiological Risk Group      | RG1                              |
| Total power consumption (W)     | 114                              |
| Electrical protection           | Class I                          |
| Control gear type               | LED driver constant current      |
| Dimmable                        | No                               |
| Dimming method                  | N/A                              |
| LED Flickering Rate             | Ultra low (5% or less)           |
| Housing colour                  | RAL 9016 - Traffic white / Bezel |
| IP rating                       | IP20                             |
| IK rating                       | IK03                             |
| Product EAN number              | 5410288425399                    |

### PHOTOMETRY

# Isoline

*ISOLINE 3380MM 4K ASYL 5C*

0042539

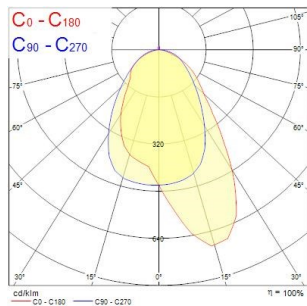

## TECHNICAL DRAWINGS

