

INSAVER SLIM 205/225 MULTIPOWER

Insaver Slim U19 IP44 225 Multipower 770-2400 830

0030388

Product features



- Ceiling recessed LED downlight. With the help of DIP Switch multiple lumen outputs can be set up in 8 steps (5.8W 770lm, 7.5W 1000lm, 9W 1200lm, 11.5W 1500lm, 13W 1650lm, 15.5W 1940m, 17W 2100lm, 19.5 2440lm). Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver ; 3000K; UGR <19 with shallow product depth 60mm. Meets TP(a) requirements.



PRODUCT OVERVIEW











Product name	Insaver Slim U19 IP44 225 Multipower 770-2400 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4278488
Warranty	5 years
Fixture luminous flux (lm)	2440
Luminaire efficacy (lm/W)	125
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	60
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	19.5
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303888

PHOTOMETRY

INSAVER SLIM 205/225 MULTIPOWER


Insaver Slim U19 IP44 225 Multipower 770-2400 830

0030388



INSAVER SLIM 205/225 MULTIPOWER

Insaver Slim U19 IP44 225 Multipower 770-2400 830
0030388

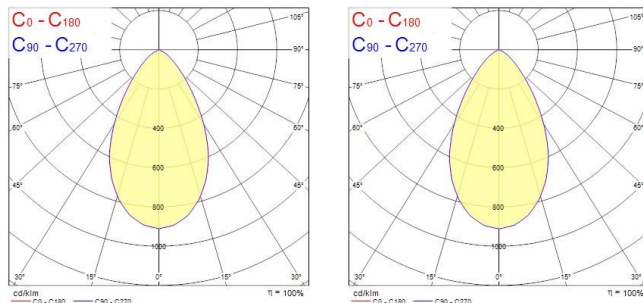

TECHNICAL DRAWINGS

