

## Isoline

ISOLINE 3380MM 4K 1.7 MD UGR 1.7BLK

0042556



### Product features

- Isoline LED linear luminaire for industrial and commercial applications. 3380mm length with 1.7m blank section, with medium optics provide homogenous light distribution for aisles and focus areas. Aluminium housing, RAL 9016. Max + 35 °C operating temperature range, 4000 K, CRI 80, UGR <20, 3 SDCM. 57W power consumption, 8800lm luminous flux, 154 lm/W efficacy, 3380 mm x62 mm x 59 mm (L x W x H) dimensions, IP20, IK03, 220-240 V 50/60 Hz, Class I. Lifespan L70:B50 60,000 hours.




## PRODUCT OVERVIEW

|                                 |                                     |
|---------------------------------|-------------------------------------|
| Product name                    | ISOLINE 3380MM 4K 1.7 MD UGR 1.7BLK |
| Technology                      | LED                                 |
| Housing                         | Aluminium                           |
| Mount                           | Suspended                           |
| Fixture rating                  | Enclosed                            |
| General application             | Logistics & Industry, Retail        |
| ETIM Class                      | EC000986                            |
| Warranty                        | 5 years                             |
| Fixture luminous flux (lm)      | 8800                                |
| Luminous flux (lm)              | 8800                                |
| Luminaire efficacy (lm/W)       | 154                                 |
| Colour temperature (K)          | 4000                                |
| Colour Code                     | 840                                 |
| Light colour                    | Neutral White                       |
| CRI (Ra)                        | 80                                  |
| Colour Variation Initial (SDCM) | SDCM3                               |
| Beam Angle (°)                  | 60                                  |
| Glare control                   | < 20                                |
| Photobiological Risk Group      | RG1                                 |
| Total power consumption (W)     | 57                                  |
| Electrical protection           | Class I                             |
| Control gear type               | LED driver constant current         |
| Dimmable                        | No                                  |
| Dimming method                  | N/A                                 |
| LED Flickering Rate             | Ultra low (5% or less)              |
| Housing colour                  | RAL 9016 - Traffic white / Bezel    |
| IP rating                       | IP20                                |
| IK rating                       | IK03                                |
| Product EAN number              | 5410288425566                       |

## PHOTOMETRY

Isoline  
ISOLINE 3380MM 4K 1.7 MD UGR 1.7BLK  
0042556

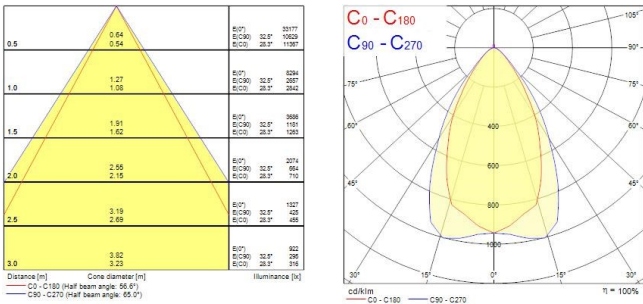

TECHNICAL DRAWINGS

