

START Surface IP44 DualTone
START Surface IP44 2900lm 830/840 DualTone DIM EM
0043440



Product features

- Ceiling / wall luminaire with integrated LED. Perfect solution for hallways, circulation spaces or foyer. Even and uniform light distribution with a halo lighting effect on the wall surface. Body Size diameter 390mm. Besa mounting box compatible, hole distance 51 & 78mm. DualTone functionality enables switch between 3000K and 4000K colour temperatures. Power 32W, output 2900 lumens (4000K). Dimmable, leading/trailing edge. IK03, IP44. Low maintenance with lifespan 90,000 hours L70:B50. Integrated non-maintained 3 hours LiFePO4 emergency kit.




PRODUCT OVERVIEW

Product name	START Surface IP44 2900lm 830/840 DualTone DIM EM
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
General application	Hospitality
ETIM Class	EC002892
Warranty	3 years
Fixture luminous flux (lm)	2900
Luminaire efficacy (lm/W)	91
Colour temperature (K)	4000
Light colour	Amber White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	120
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	120
Total power consumption (W)	32
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
LED Flickering Rate	Medium (21% - 40%)
Housing colour	White
IP rating	IP44
IK rating	IK03
Product EAN number	5410288434407

PHOTOMETRY

START Surface IP44 DualTone
START Surface IP44 2900lm 830/840 DualTone DIM EM
0043440

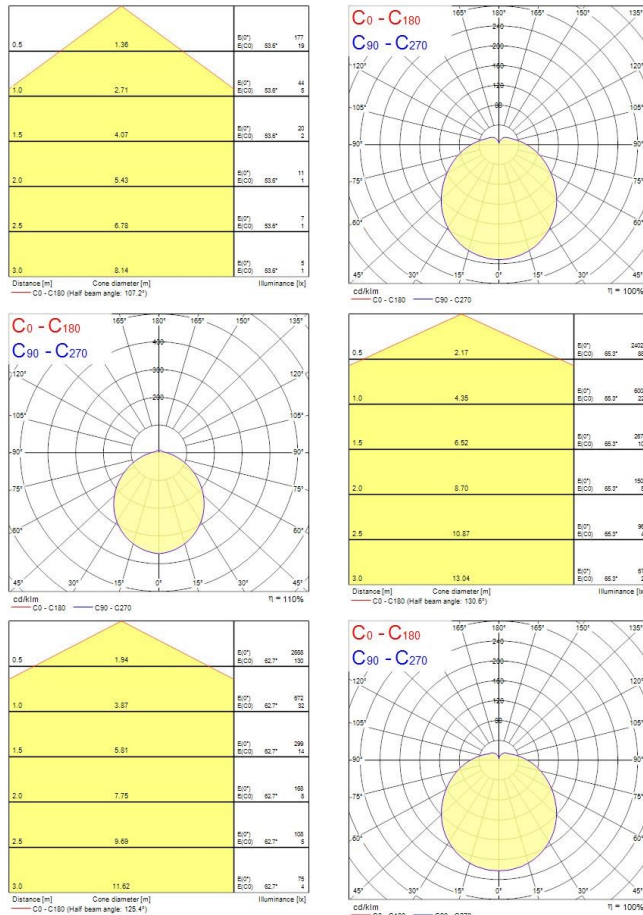

TECHNICAL DRAWINGS

