

START Surface IP44 DualTone  
START Surface IP44 1025lm 830/840 DualTone  
0043426



Product features

- Ceiling / wall luminaire with integrated LED. Perfect solution for hallways, circulation spaces or foyer. Even and uniform light distribution with a halo lighting effect on the wall surface. Body Size diameter 250mm. Besa mounting box compatible, hole distance 51mm. DualTone functionality enables switch between 3000K and 4000K colour temperatures. Power 12W, output 1025 lumens (4000K). Non-dimmable. IK03, IP44. Low maintenance with lifespan 90,000 hours L70:B50.




PRODUCT OVERVIEW

|                                 |                                            |
|---------------------------------|--------------------------------------------|
| Product name                    | START Surface IP44 1025lm 830/840 DualTone |
| Technology                      | LED                                        |
| Cap/Base                        | N/A                                        |
| Housing                         | Steel                                      |
| Mount                           | Ceiling surface mounting                   |
| General application             | Hospitality                                |
| ETIM Class                      | EC002892                                   |
| E-number FI                     | 4170569                                    |
| Warranty                        | 3 years                                    |
| Fixture luminous flux (lm)      | 1025                                       |
| Luminaire efficacy (lm/W)       | 85                                         |
| Colour temperature (K)          | 4000                                       |
| Light colour                    | Amber White or Neutral White               |
| CRI (Ra)                        | 80                                         |
| Colour Variation Initial (SDCM) | SDCM6                                      |
| Beam Angle (°)                  | 120                                        |
| Photobiological Risk Group      | RG0                                        |
| Total power consumption (W)     | 12                                         |
| Electrical protection           | Class I                                    |
| Control gear type               | LED driver constant current                |
| Dimmable                        | No                                         |
| Dimming method                  | N/A                                        |
| LED Flickering Rate             | High (>40%)                                |
| Housing colour                  | White                                      |
| IP rating                       | IP44                                       |
| IK rating                       | IK03                                       |
| Product EAN number              | 5410288434261                              |

PHOTOMETRY

**START Surface IP44 DualTone**  
*START Surface IP44 1025lm 830/840 DualTone*  
**0043426**

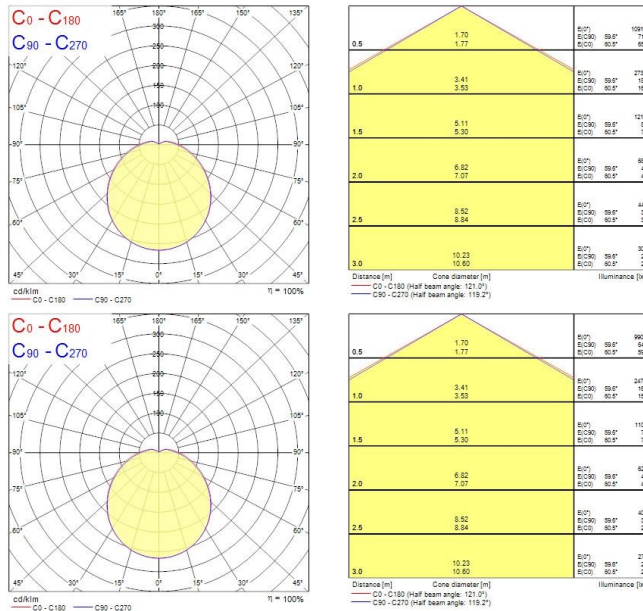

## TECHNICAL DRAWINGS

