


Start Flood Flat PIR
Start Flood Flat IP54 PIR 2850LM 830 Black
0050137



Product features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood Flat a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 2850 lm, 28 W, 102 lm/W, 3000K, non dimmable, CRI>80, IP54, IK06 - fixture, IK05 - sensor, Class I, lifespan L70:B50: 90000 hrs, 201 x 156 x 57 mm (L x W x H). Weight: 0.575kg. PIR sensor included.

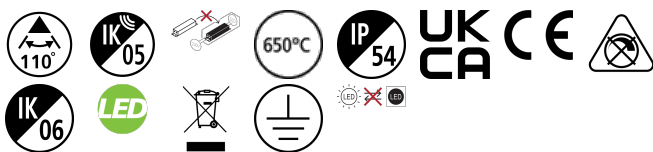


PRODUCT OVERVIEW

Product name	Start Flood Flat IP54 PIR 2850LM 830 Black
Technology	LED
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4579541
Warranty	3 years
Fixture luminous flux (lm)	2850
Luminaire efficacy (lm/W)	102
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	110
Photobiological Risk Group	RG1
Total power consumption (W)	28.0
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Low (6% - 20%)
Housing colour	Black
IP rating	IP54
IK rating	IK06
Product EAN number	5410288501376

PHOTOMETRY

Start Flood Flat PIR
Start Flood Flat IP54 PIR 2850LM 830 Black
0050137

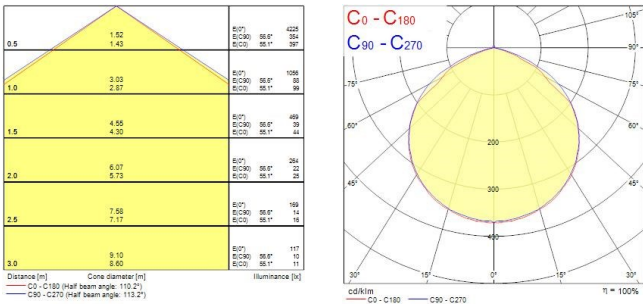

TECHNICAL DRAWINGS

