

Start Surface Wall Round

START Surface Wall Round IP54 500lm Direct 2CCT

0047134



Product features

- Round shaped exterior surface wall light with integrated LED, RAL9005 - Black Aluminium housing, light emission on one side, 500/480 lm, 6.7 W, 75/72 lm/W, 3000 or 4000K adjustable CCT, non dimmable, CRI>80, 220-240V, Class I, lifespan L70:B50: 90000 hrs IP54, IK07, 76 x 129 x 110mm (W x H x D). Weight: 0.55 kg.



PRODUCT OVERVIEW


Product name	START Surface Wall Round IP54 500lm Direct 2CCT
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Wall recessed, Wall surface mounted
General application	Residential & Consumer
ETIM Class	EC002892
E-number FI	4579601
Warranty	5 years
Fixture luminous flux (lm)	500
Luminaire efficacy (lm/W)	75
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	40
Photobiological Risk Group	RG1
Total power consumption (W)	6.7
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Housing colour	RAL 9005 - Jet black
IP rating	IP54
IK rating	IK07
Product EAN number	5410288471341

PHOTOMETRY

Start Surface Wall Round

START Surface Wall Round IP54 500lm Direct 2CCT

0047134

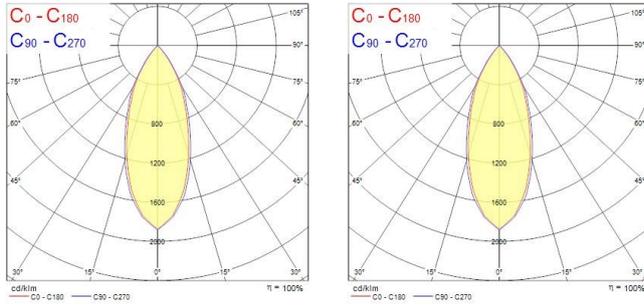

TECHNICAL DRAWINGS

