


START Waterproof Tubular IP66
START Waterproof Tubular 1200 IP66 4300lm 830 PC
0047150



Product features


- START Waterproof Tubular is an aesthetically attractive integrated LED fixture. Easy to install with 304 stainless steel fixing brackets for ceiling mounting. Polycarbonate housing; 3000K; 35W; 4250lm; High efficiency with 121lm/W and lumen maintenance L80:B50 of 54,000 hours lifetime. IP66; IK10; Class I; 1195mm x 70mm. Can be suspended with additional accessory (SKU 0046035).

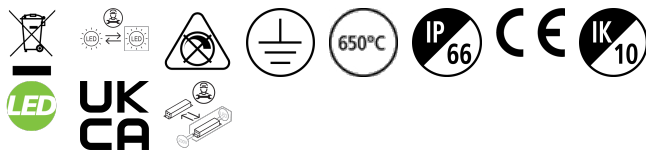

PRODUCT OVERVIEW

Product name	START Waterproof Tubular 1200 IP66 4300lm 830 PC
Technology	LED
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	5 years
Fixture luminous flux (lm)	4250
Luminaire efficacy (lm/W)	121
Colour temperature (K)	3000
CRI (Ra)	80
Beam Angle (°)	120
Photobiological Risk Group	RG1
Total power consumption (W)	35
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
IP rating	IP66
IK rating	IK10
Product EAN number	5410288471501

PHOTOMETRY

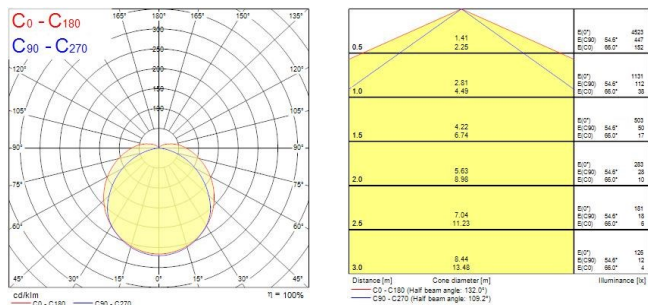

START Waterproof Tubular IP66

START Waterproof Tubular 1200 IP66 4300lm 830 PC

0047150

TECHNICAL DRAWINGS

