


## RANA LED Recessed 600

### RANA LED R 600 LO 3K LOUV+PRI W GEN2

### 0052400



#### Product features

- Ceiling Recessed LED Linear luminaire (lay-in), with Louvre + Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 595x595x60mm, Sylvania White body colour, IP20, IK07, Light Engine Dimensions: 570x130mm, Constant Current, Low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 2800lm, 28W, 100lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m2, Lumen Maintenance: L90B10 at 50,000 hours, Glow Wire Test 850°C, Quick and easy electrical connection with direct access to push-connectors on top, 2 x metallic safety cables (1.5m) included, the luminaire can be covered with building insulation of Glass Wool type.




#### PRODUCT OVERVIEW

|                                 |                                        |
|---------------------------------|----------------------------------------|
| Product name                    | RANA LED R 600 LO 3K LOUV+PRI W GEN2   |
| Technology                      | LED                                    |
| Cap/Base                        | N/A                                    |
| Housing                         | Steel                                  |
| Mount                           | Ceiling recessed mounting              |
| General application             | Education, Hospitality, Office, Retail |
| ETIM Class                      | EC002892                               |
| E-number FI                     | 4273746                                |
| Warranty                        | 5 years                                |
| Fixture luminous flux (lm)      | 2800                                   |
| Luminous flux (lm)              | 2800                                   |
| Luminaire efficacy (lm/W)       | 100                                    |
| Colour temperature (K)          | 3000                                   |
| Light colour                    | Warm White                             |
| CRI (Ra)                        | 80                                     |
| Colour Variation Initial (SDCM) | SDCM3                                  |
| Glare control                   | < 19                                   |
| Photobiological Risk Group      | RG0                                    |
| Total power consumption (W)     | 28                                     |
| Electrical protection           | Class I                                |
| Control gear type               | LED driver constant current            |
| Dimmable                        | No                                     |
| Dimming method                  | N/A                                    |
| LED Flickering Rate             | Ultra low (5% or less)                 |
| Housing colour                  | White                                  |
| IP rating                       | IP20                                   |
| IK rating                       | IK07                                   |
| Product EAN number              | 5410288524009                          |

#### PHOTOMETRY

RANA LED Recessed 600  
RANA LED R 600 LO 3K LOUV+PRI W GEN2  
0052400

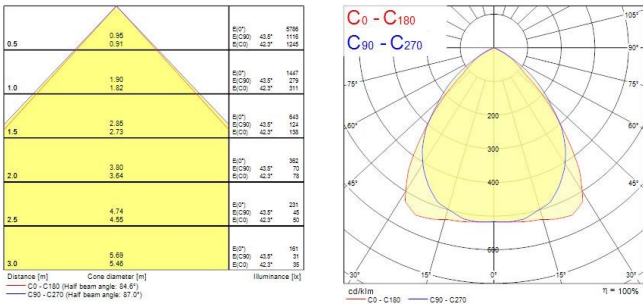

TECHNICAL DRAWINGS

