

Sylproof Superia LED G3 DALI


SYLPROOF SUPERIA LED G3 1500mm Twin 4K QC DALI

0048753



Product features

- Sylproof Superia, integrated LED weatherproof luminaire with quick connector, UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. Polycarbonate housing, Polycarbonate diffuser, DALI dimmable, 4000K, CRI80, 7100 lm, 47 W, 145 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I, IK08, IP65.

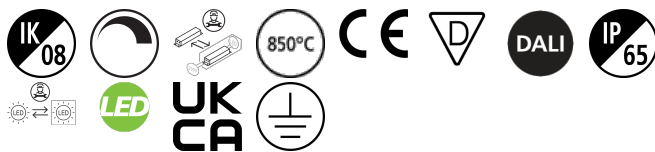


PRODUCT OVERVIEW

Product name	SYLPROOF SUPERIA LED G3 1500mm Twin 4K QC DALI
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	5 years
Fixture luminous flux (lm)	7100
Luminaire efficacy (lm/W)	145
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	100
Photobiological Risk Group	RG1
Total power consumption (W)	47
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288487533

PHOTOMETRY

Sylproof Superia LED G3 DALI
SYLPROOF SUPERIA LED G3 1500mm Twin 4K QC DALI
0048753

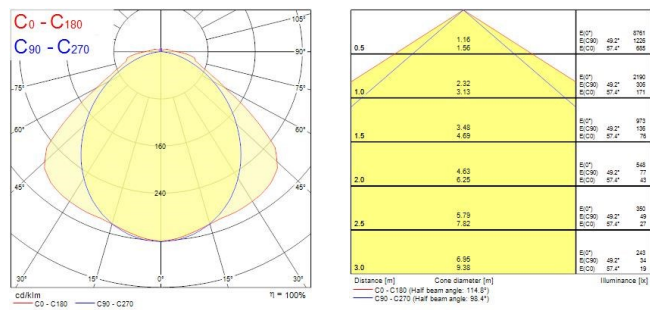

TECHNICAL DRAWINGS

