

RANA LED Surface 1500  
RANA LED S 1500 LO 4K LOUV+PRI W GEN2  
0051505



Product features

- Surface or Suspended LED Linear luminaire with Louvre + Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 1440x187x47mm, Sylvania White body colour, IP20, IK07, Light Engine Dimensions: 1410x65mm, Constant Current, Low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 4000lm, 34W, 118lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m2, Lumen Maintenance: L90B10 at 50,000 hours, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.




PRODUCT OVERVIEW

|                                 |                                        |
|---------------------------------|----------------------------------------|
| Product name                    | RANA LED S 1500 LO 4K LOUV+PRI W GEN2  |
| Technology                      | LED                                    |
| Cap/Base                        | N/A                                    |
| Housing                         | Steel                                  |
| Mount                           | Ceiling surface mounting, Suspended    |
| General application             | Office, Hospitality, Retail, Education |
| ETIM Class                      | EC002892                               |
| E-number FI                     | 4273704                                |
| Warranty                        | 5 years                                |
| Fixture luminous flux (lm)      | 4000                                   |
| Luminous flux (lm)              | 4000                                   |
| Luminaire efficacy (lm/W)       | 118                                    |
| Colour temperature (K)          | 4000                                   |
| Light colour                    | Neutral White                          |
| CRI (Ra)                        | 80                                     |
| Colour Variation Initial (SDCM) | SDCM3                                  |
| Glare control                   | < 19                                   |
| Photobiological Risk Group      | RG0                                    |
| Total power consumption (W)     | 34                                     |
| Electrical protection           | Class I                                |
| Control gear type               | LED driver constant current            |
| Dimmable                        | No                                     |
| Housing colour                  | White                                  |
| IP rating                       | IP20                                   |
| IK rating                       | IK07                                   |
| Product EAN number              | 5410288515052                          |

PHOTOMETRY

**RANA LED Surface 1500**  
*RANA LED S 1500 LO 4K LOUV+PRI W GEN2*  
**0051505**

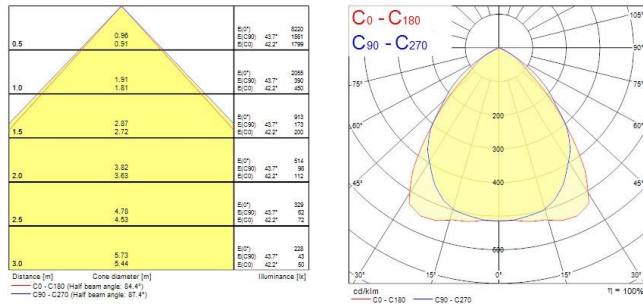

## TECHNICAL DRAWINGS

