


START Downlight Flat IP44 Dimmable 205mm Round Recessed

START eco Downlight Flat 205 IP44 1750lm 840 DIM
0053942



Product features

- START eco Downlight Flat IP44 DIM is an integrated LED recessed downlight with a separate, phase dimmable driver and loop in- out box, 17W; 1750Lm; 103Lm/W; 4000K; IP44 rated from the front.

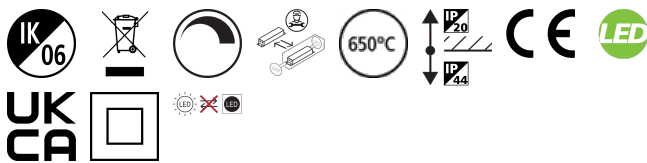


PRODUCT OVERVIEW

Product name	START eco Downlight Flat 205 IP44 1750lm 840 DIM
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality
ETIM Class	EC001744
Warranty	3 years
Fixture luminous flux (lm)	1750
Luminaire efficacy (lm/W)	103
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	120
Glare control	< 28
Photobiological Risk Group	RG0
Max load (A)	112
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK06
Product EAN number	5410288539423

PHOTOMETRY

START Downlight Flat IP44 Dimmable 205mm Round Recessed

START eco Downlight Flat 205 IP44 1750lm 840 DIM
0053942

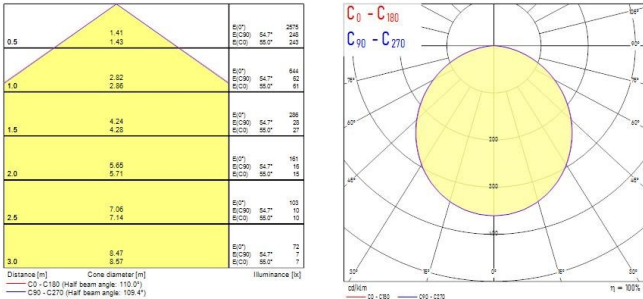

TECHNICAL DRAWINGS

