


Start Surface IP66 Ø350mm New
START Surface IP66 900-2950LM 840 IK10 WHT
0049293



Product features

- LED exterior surface mounted luminaire, 350mm diameter, 2950lm as max. lumen output, can be adjusted down to 900lm by internal switch, max 24W power consumption, max 133lm/W efficacy, 4000K color temperature, CRI80, non-dimmable, IP66, IK10, 100,000 hours (L70B50) Lifespan, white housing, vandal resistant, supplied with anti-theft screws

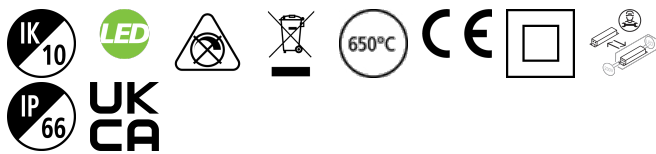

PRODUCT OVERVIEW

Product name	START Surface IP66 900-2950LM 840 IK10 WHT
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4579594
Warranty	5 years
Fixture luminous flux (lm)	2950
Luminaire efficacy (lm/W)	120
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	RG0
Total power consumption (W)	24
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Housing colour	RAL 9003 - Signal white
IP rating	IP66
IK rating	IK10
Product EAN number	5410288492933

PHOTOMETRY


Start Surface IP66 Ø350mm New START Surface IP66 900-2950LM 840 IK10 WHT 0049293

0.5	1.43 1.43	E(0°) E(C90) E(C270)	339° 288 288
1.0	2.95 2.95	E(0°) E(C90) E(C270)	849 72 74
1.5	4.43 4.46	E(0°) E(C90) E(C270)	977 37 35
2.0	5.91 5.95	E(0°) E(C90) E(C270)	312 19 18
2.5	7.38 7.44	E(0°) E(C90) E(C270)	136 12 12
3.0	8.86 8.93	E(0°) E(C90) E(C270)	84 8 8

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 112.2°)
C90 - C270 (Half beam angle: 111.8°)

0.5	1.43 1.43	E(0°) E(C90) E(C270)	1154 102 102
1.0	2.95 2.95	E(0°) E(C90) E(C270)	388 35 35
1.5	4.43 4.46	E(0°) E(C90) E(C270)	128 11 11
2.0	5.91 5.95	E(0°) E(C90) E(C270)	72 6 6
2.5	7.38 7.44	E(0°) E(C90) E(C270)	46 4 4
3.0	8.86 8.93	E(0°) E(C90) E(C270)	32 3 3

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 112.2°)
C90 - C270 (Half beam angle: 111.8°)








0.5	1.43 1.43	E(0°) E(C90) E(C270)	1985 172 172
1.0	2.95 2.95	E(0°) E(C90) E(C270)	489 42 42
1.5	4.43 4.46	E(0°) E(C90) E(C270)	217 19 19
2.0	5.91 5.95	E(0°) E(C90) E(C270)	122 11 11
2.5	7.38 7.44	E(0°) E(C90) E(C270)	79 7 7
3.0	8.86 8.93	E(0°) E(C90) E(C270)	54 5 5


Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 112.2°)
C90 - C270 (Half beam angle: 111.8°)

0.5	1.43 1.43	E(0°) E(C90) E(C270)	1833 136 124
1.0	2.95 2.95	E(0°) E(C90) E(C270)	385 34 32
1.5	4.43 4.46	E(0°) E(C90) E(C270)	171 16 15
2.0	5.91 5.95	E(0°) E(C90) E(C270)	96 9 8
2.5	7.38 7.44	E(0°) E(C90) E(C270)	62 5 5
3.0	8.86 8.93	E(0°) E(C90) E(C270)	42 4 4

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 112.2°)
C90 - C270 (Half beam angle: 111.8°)



Start Surface IP66 Ø350mm New START Surface IP66 900-2950LM 840 IK10 WHT 0049293

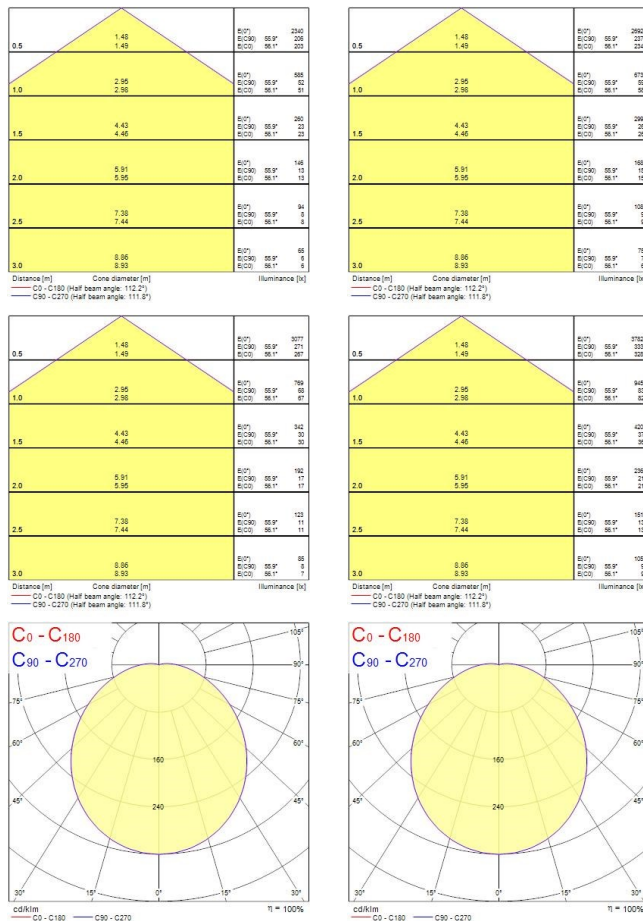

TECHNICAL DRAWINGS

