


START Flex High Output
START Flex IP65 830 10250lm
0068118



Product features

- 5 metre IP65 LED reel with pre-attached 3M adhesive type; equipped with 420 LEDs; 10250lm per 5m (2050lm per 1m); 24V; 3000K; CRI80; SDCM 3. Needs to be used with aluminium profile for cooling LED chips purpose and therefore assuring longer lifetime (Profile HO Surface 16 0022604 can be used);Compatible with emergency packs: 0046600, 0046601

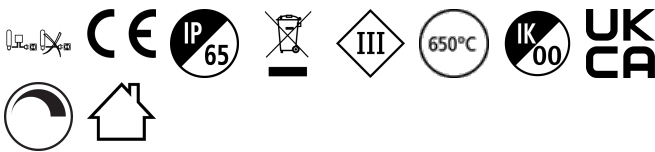


PRODUCT OVERVIEW

Product name	START Flex IP65 830 10250lm
Technology	LED
Housing	Other
Mount	Other
General application	Hospitality, Retail
ETIM Class	EC002706
E-number FI	4276903
Warranty	5 years
Fixture luminous flux (lm)	10250
Luminaire efficacy (lm/W)	124
Colour temperature (K)	3000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Beam Angle (°)	N/A
Photobiological Risk Group	RG1
Total power consumption (W)	82.5
Electrical protection	Class III
Dimmable	Yes
Dimming method	Other
Housing colour	Beige
IP rating	IP65
IK rating	IK00
Product EAN number	5410288681184


PHOTOMETRY

START Flex High Output
START Flex IP65 830 10250lm
0068118



0.5	1.33 1.41	E(0°) E(C90) E(C180)	2622 219 285
1.0	2.65 2.81	E(0°) E(C90) E(C180)	1311 80 71
1.5	3.98 4.22	E(0°) E(C90) E(C180)	328 35 32
2.0	5.31 5.63	E(0°) E(C90) E(C180)	188 20 18
2.5	6.64 7.04	E(0°) E(C90) E(C180)	117 13 11
3.0	7.96 8.44	E(0°) E(C90) E(C180)	81 9 8

Distance [m] Cone diameter [m] Illuminance [lx]
—— C0 - C180 (Half beam angle: 108.2°)
—— C90 - C270 (Half beam angle: 106.0°)



TECHNICAL DRAWINGS

