



START Flex High Output
START Flex IP65 827 10250lm
0068132



Product features

- 5 metre IP65 LED reel with pre-attached 3M adhesive type; equipped with 420 LEDs, 24V; 2700K; CRI80; SDCM 3; Compatible with emergency packs: 0046600, 0046601

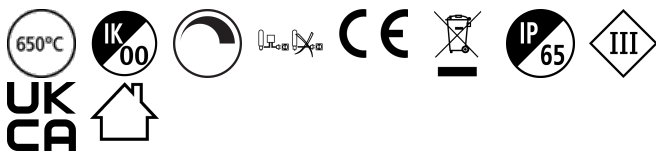


PRODUCT OVERVIEW


Product name	START Flex IP65 827 10250lm
Technology	LED
Housing	Other
Mount	Other
General application	Hospitality, Retail
ETIM Class	EC002706
E-number FI	4276902
Warranty	5 years
Fixture luminous flux (lm)	10250
Luminaire efficacy (lm/W)	124
Colour temperature (K)	2700
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Beam Angle (°)	N/A
Photobiological Risk Group	RG1
Total power consumption (W)	82.5
Electrical protection	Class III
Dimmable	Yes
Dimming method	Other
Housing colour	Beige
IP rating	IP65
IK rating	IK00
Product EAN number	5410288681320

PHOTOMETRY

START Flex High Output
START Flex IP65 827 10250lm
0068132



Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	1.52	1.52	1.52	2768
1.0	3.04	3.04	3.04	696
1.5	4.57	4.57	4.57	311
2.0	6.09	6.09	6.09	155
2.5	7.61	7.61	7.61	99
3.0	9.13	9.13	9.13	66



TECHNICAL DRAWINGS

