

Optix Linear Surface 1200 Direct-Indirect

OPTIX LINEAR SURFACE 1200 DI LUMI 4K ALU DALI

2023858



Product features

- OPTIX LINEAR SURFACE 1200 D/I LUMI 4000K ALU DALI is a suspended linear luminaire for office and education applications with Aluminised plastic extra low glare optics and RAL9016 colour fixture body. DALI dimmable. 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. For 4000K - Colour rendering index Ra >98; Melanopic Ratio MEER: 0.784; Fidelity Index R_a :93; Gamut Index R_a :98. For 4000K luminous flux: 4000lm. Power consumption: 36W. Luminaire efficacy: 111lm/W. UGR<16 Luminance at 65°<200 Cd/m², IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C. 60,000hrs L80B20 lifespan.




PRODUCT OVERVIEW

Product name	OPTIX LINEAR SURFACE 1200 DI LUMI 4K ALU DALI
Technology	LED LumiNature
Cap/Base	N/A
Housing	Steel
Mount	Suspended
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	4020
Luminaire efficacy (lm/W)	112
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	98
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Glare control	< 16
Photobiological Risk Group	RG1
Total power consumption (W)	36
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768238583

PHOTOMETRY

Optix Linear Surface 1200 Direct-Indirect
OPTIX LINEAR SURFACE 1200 DI LUMI 4K ALU DALI
 2023858

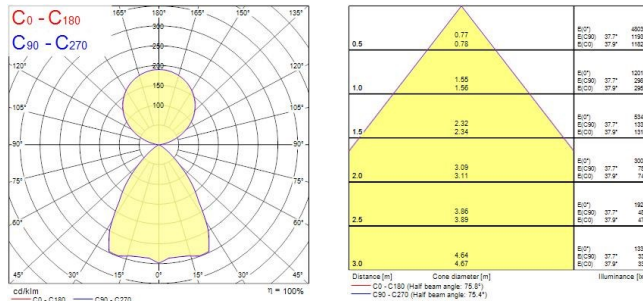

TECHNICAL DRAWINGS

