

## Officelyte LED


### OFFICELYTE 600X600 HE 3K DALI

### 2069241



#### Product features

- Concord OFFICELYTE 600X600 HE 3K DALI is a high performance low glare luminaire for offices and education applications. Ceiling recessed 600x600mm. Micro Prismatic optics. White RAL 9010. DALI dimmable. 3000K Warm White LED, Typical CRI=85, chromaticity tolerance of 3-step MacAdam ellipse, lumen package of 3,250lm, total power consumption 24W, efficacy of 135lm/W. Lifespan 120,000 hours L70B50, 58,000 hours L80B20, UGR<19. IK02, IP20, Electrical Protection Class I, Photobiological Risk Group 0. PMMA diffuser, Glow Wire test 650°C.

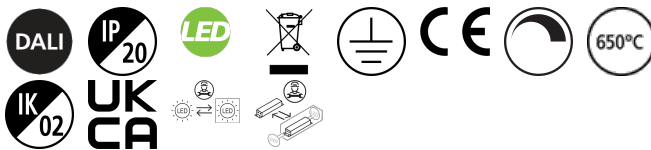


#### PRODUCT OVERVIEW

|                                 |                                        |
|---------------------------------|----------------------------------------|
| Product name                    | OFFICELYTE 600X600 HE 3K DALI          |
| Technology                      | LED (3 SDCM)                           |
| Cap/Base                        | N/A                                    |
| Housing                         | Steel                                  |
| Mount                           | Ceiling recessed mounting              |
| Fixture rating                  | Enclosed                               |
| General application             | Office, Hospitality, Retail, Education |
| ETIM Class                      | EC002892                               |
| Warranty                        | 5 years                                |
| Fixture luminous flux (lm)      | 3250                                   |
| Luminous flux (lm)              | 3250                                   |
| Luminaire efficacy (lm/W)       | 135                                    |
| LOR (%)                         | 100                                    |
| Colour temperature (K)          | 3000                                   |
| Light colour                    | Warm White                             |
| CRI (Ra)                        | 80                                     |
| Colour Variation Initial (SDCM) | SDCM3                                  |
| Colour Consistency (SDCM)       | 3                                      |
| Glare control                   | < 19                                   |
| Photobiological Risk Group      | RG0                                    |
| Total power consumption (W)     | 24                                     |
| Electrical protection           | Class I                                |
| Control gear type               | Electronic ballast                     |
| Control gear mounting           | Remote                                 |
| Dimmable                        | Yes                                    |
| Dimming method                  | DALI                                   |
| Housing colour                  | RAL 9016 - Traffic white / Bezel       |
| IP rating                       | IP20                                   |
| IK rating                       | IK02                                   |
| Product EAN number              | 5025768692415                          |

Officelyte LED  
OFFICELYTE 600X600 HE 3K DALI  
2069241

PHOTOMETRY

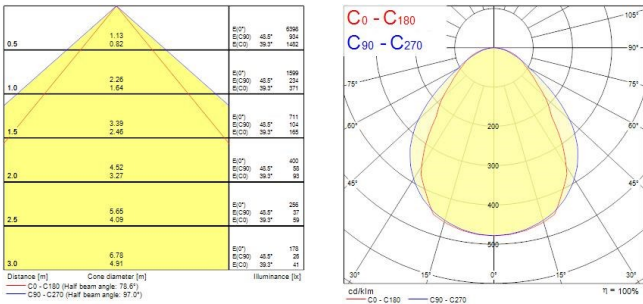

TECHNICAL DRAWINGS

