

Beacon LED XXL


BEACON XXL MB DALI 4K L3 WHT

2093051



Product features

- 2093051 BEACON XXL MB DALI 4K L3 WHT Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for double height spaces, retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 50° medium beam, optics: Silicone lens for controlled beam, colour temperature: 4000K neutral white, total system power: 48W, total fixture output: 4179lm, luminaire efficacy: 87lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1200mA, electronic driver, DALI dimmable, power factor: 0.95 electrical protection: CLASS I, DALI track adaptor, suitable for Concord Lytespan DALI track, ingress protection rating: IP20. IMPORTANT NOTE: This fixture can only be used on the Lytespan DALI or Lytebeam DALI tracks !

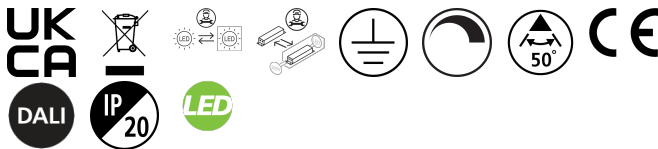


PRODUCT OVERVIEW

Product name	BEACON XXL MB DALI 4K L3 WHT
Technology	LED
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Retail
ETIM Class	EC001744
E-number FI	4278827
E-number SE	7401076
Warranty	5 years
Fixture luminous flux (lm)	4179
Luminaire efficacy (lm/W)	87.06
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Beam Angle (°)	50
Photobiological Risk Group	RG1
Total power consumption (W)	48
Product Voltage (V)	240
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	DALI
Housing colour	White
IP rating	IP20
Product EAN number	5025768930517

Beacon LED XXL
BEACON XXL MB DALI 4K L3 WHT
2093051

PHOTOMETRY

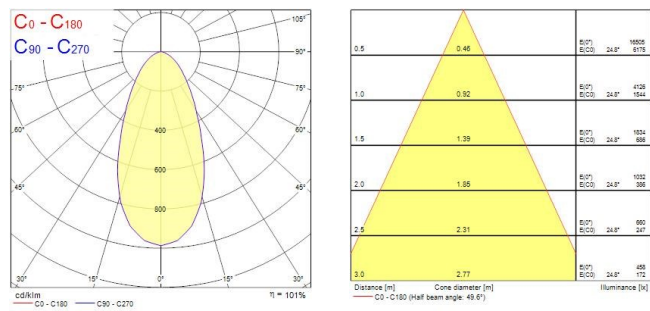

TECHNICAL DRAWINGS

