


Raiden 50KLM

Raiden IP66 50KLM 840 Asymmetric Wide DALI
2824110



Product features

- Outdoor and indoor floodlight range with in house design, comes complete with 1m flying lead and adjustable bracket, aluminium housing, RAL 9022 - Pearl light grey, clear glass diffuser, IP66, IK08, Class I, 4000K, DALI dimmable (2pcs of DALI drivers), 49500lm, 375W, 132lm/W, CRI80, Asymmetric Wide beam angle 110*50°, 100000 hrs L90B50 lifespan, 561x569x76mm (LxWxH) dimensions, 14.5kg weight. Ball-impact-resistance according to DIN57710-13 VDE 0710 13/5.81, DIN 18032-3 only with the separate wire guard accessory fitted.

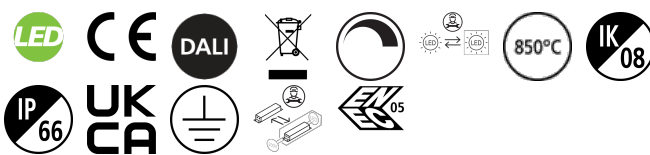


PRODUCT OVERVIEW

Product name	Raiden IP66 50KLM 840 Asymmetric Wide DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
General application	Logistics & Industry
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	49500
Luminaire efficacy (lm/W)	132
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	110*50
Photobiological Risk Group	RG2
Total power consumption (W)	375
Electrical protection	Class I
Dimmable	Yes
Dimming method	DALI-2
Housing colour	RAL 9022 - Pearl light grey
IP rating	IP66
IK rating	IK08
Product EAN number	5025768241101

PHOTOMETRY

Raiden 50KLM

Raiden IP66 50KLM 840 Asymmetric Wide DALI
2824110



TECHNICAL DRAWINGS

