

Giotto LED 335


GIOTTO 335 4000K RECESSED 1-10V MW SENSOR

3034810



Product features

- Ambient and decorative round, recessed mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 2350lm, 18.2W, 129lm/W, 4000K, CRI 80, 1-10V dimmable, integral microwave sensor. 100,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.

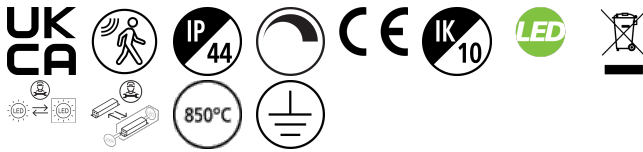

PRODUCT OVERVIEW

Product name	GIOTTO 335 4000K RECESSED 1-10V MW SENSOR
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Logistics & Industry
ETIM Class	EC002892
E-number FI	4270237
Warranty	5 years
Fixture luminous flux (lm)	2350
Luminous flux (lm)	2350
Luminaire efficacy (lm/W)	129
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Glare control	< 26
Photobiological Risk Group	RG0
Total power consumption (W)	23
Electrical protection	Class I
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	Yes
Dimming method	1-10V (Analogue)
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP44
IK rating	IK10
Product EAN number	8711971348108

Giotto LED 335

GIOTTO 335 4000K RECESSED 1-10V MW SENSOR


3034810

PHOTOMETRY

0.5	1.61	E(0°) E(C0)	260 211
1.0	3.21	E(0°) E(C0)	176 91
1.5	4.82	E(0°) E(C0)	141 23
2.0	6.43	E(0°) E(C0)	119 13
2.5	8.03	E(0°) E(C0)	115 8
3.0	9.64	E(0°) E(C0)	92 6

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 116.2°)



TECHNICAL DRAWINGS

