

## Giotto LED 305

### GIOTTO 305 4000K SURFACE EMERGENCY

#### 3034784



#### Product features

- Ambient and decorative round, surface mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 1750lm, 16W, 109lm/W, 4000K, CRI 80, non-dimmable, integral 3 hour maintained emergency, 100,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.




#### PRODUCT OVERVIEW

|                                 |                                                 |
|---------------------------------|-------------------------------------------------|
| Product name                    | GIOTTO 305 4000K SURFACE EMERGENCY              |
| Technology                      | LED                                             |
| Cap/Base                        | N/A                                             |
| Housing                         | PC Polycarbonate                                |
| Mount                           | Ceiling recessed mounting, Wall surface mounted |
| Environment                     | Indoor                                          |
| General application             | Hospitality, Logistics & Industry               |
| ETIM Class                      | EC002892                                        |
| Warranty                        | 5 years                                         |
| Fixture luminous flux (lm)      | 1750                                            |
| Luminous flux (lm)              | 1750                                            |
| Luminaire efficacy (lm/W)       | 109                                             |
| Colour temperature (K)          | 4000                                            |
| Colour Code                     | 840                                             |
| Light colour                    | Neutral White                                   |
| CRI (Ra)                        | 80                                              |
| Colour Variation Initial (SDCM) | SDCM3                                           |
| Beam Angle (°)                  | 120                                             |
| Glare control                   | < 24                                            |
| Photobiological Risk Group      | RG0                                             |
| Luminous flux (emergency) (lm)  | 138                                             |
| Luminous flux (emergency) (lm)  | 138                                             |
| Total power consumption (W)     | 20                                              |
| Electrical protection           | Class I                                         |
| Control gear type               | LED driver constant current                     |
| Control gear mounting           | Integrated                                      |
| Dimmable                        | No                                              |
| Dimming method                  | N/A                                             |
| LED Flickering Rate             | Ultra low (5% or less)                          |
| Housing colour                  | White                                           |
| IP rating                       | IP44                                            |

Giotto LED 305  
GIOTTO 305 4000K SURFACE EMERGENCY  
3034784

|                    |               |
|--------------------|---------------|
| IK rating          | IK10          |
| Product EAN number | 8711971347842 |

PHOTOMETRY

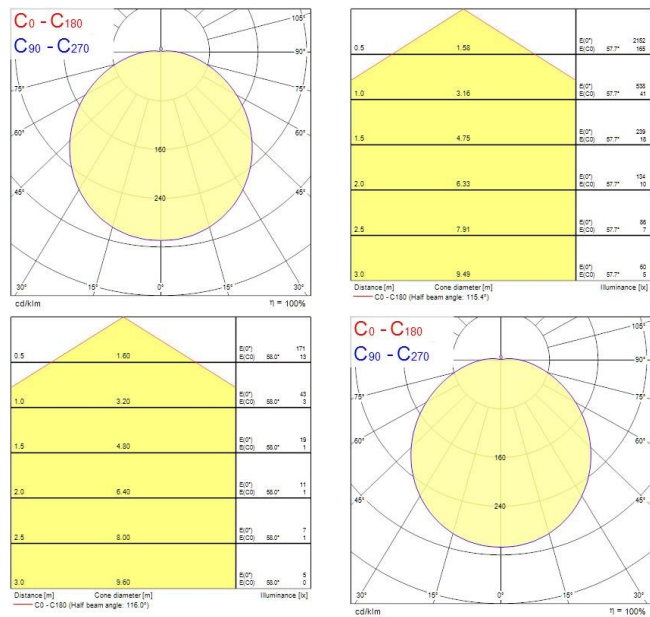

TECHNICAL DRAWINGS

