

Start Spot IP65 Fire


Start Spot Fire 540lm 3CCT IP65 WH

0059830



Product features

- Integrated LED fire rated recessed spotlight, white bezel colour, three temperature light colours selectable: 3000K, 4000K, 6500K. Lumen output 540lm (4000K), 5.5W, dimmable trailing/leading edge, 60° degree beam angle, polycarbonate and steel body with aluminium bezel, low profile 60mm recessed depth, IP65 frontal degree, IK03, loop-in/loop-out terminals for fast wiring, 87mm bezel diameter, 70-75mm cutout, clear lens. . Fire rated 30,60,90 minutes.

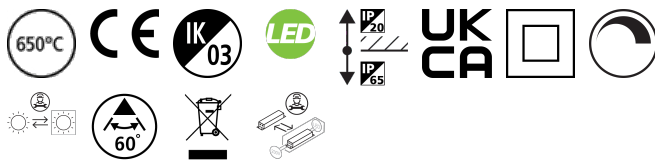

PRODUCT OVERVIEW

Product name	Start Spot Fire 540lm 3CCT IP65 WH
Technology	LED
Cap/Base	N/A
Housing	Metal/plastic
Mount	Ceiling recessed mounting
General application	Hospitality, Residential & Consumer, Retail
ETIM Class	EC001744
Warranty	3 years
Fixture luminous flux (lm)	540
Luminaire efficacy (lm/W)	98
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	60
Photobiological Risk Group	RG0
Total power consumption (W)	5.5
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Minimum dimming level (%)	10
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9003 - Signal white
IP rating	IP65/20
IK rating	IK03
Product EAN number	5410288598307

DATA TABLE

General data

Start Spot IP65 Fire

Start Spot Fire 540lm 3CCT IP65 WH

0059830

Product name	Start Spot Fire 540lm 3CCT IP65 WH
Technology	LED
Cap/Base	N/A
Housing	Metal/plastic
Mount	Ceiling recessed mounting
General application	Hospitality, Residential & Consumer, Retail
Operating temperature range (°C)	-10°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	3 years

Optical data

Fixture luminous flux (lm)	540
Luminaire efficacy (lm/W)	98
Colour temperature (K)	4000
Correlated colour temperature range (K)	3000 - 6500
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	60
Distribution type	Symmetric
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	5.5
Mains voltage (V)	220-240V
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	25
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Minimum dimming level (%)	10
Drive current (mA)	135
Drive current - Range (mA)	14mA / 135mA
Inrush Current (A)	10
Inrush Duration (µs)	150
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Medium (21% - 40%)
Max. Luminaires per 10A C Breaker	50
Max. Luminaires per 13A C Breaker	65
Max. Luminaires per 16A C Breaker	80
Max. Luminaires per 20A C Breaker	100
Max. Luminaires per 10A B Breaker	35

Start Spot IP65 Fire

Start Spot Fire 540lm 3CCT IP65 WH

0059830

Max. Luminaires per 13A B Breaker	45
Max. Luminaires per 16A B Breaker	56
Max. Luminaires per 20A B Breaker	70

Lifetime data

Lifespan L70 B50	124000
Lifespan L80 B20	59000
Lifespan L90 B10	27000

Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP65/20
IK rating	IK03
Diffuser finish	Other
Diffuser material	None
Reflector finish	None
Nominal Product Length (mm)	87
Nominal Product Width (mm)	87
Nominal Product Height (mm)	60
Nominal Product Diameter (mm)	87
Cutout Dimensions (W x L in mm or Diameter in mm)	70-75
Weight (kg)	0.27
Recessed Depth (mm)	55

Packaging

Single packaging type	Carton
Product EAN number	5410288598307
Packaging single length / height (cm)	10.5
Packaging single width (cm)	7.0
Packaging single depth (cm)	10.5
DUN14 (outer)	15410288598304
Units per outer package	50
Packaging outer length / height (cm)	54.5
Packaging outer width (cm)	23.0
Packaging outer depth (cm)	37.0







Safety data

Optimal operating condition (°C)	-10-40
----------------------------------	--------

PHOTOMETRY

Start Spot IP65 Fire

Start Spot Fire 540lm 3CCT IP65 WH
0059830

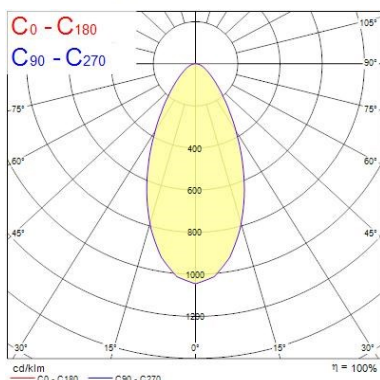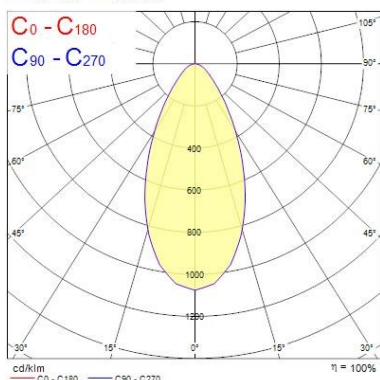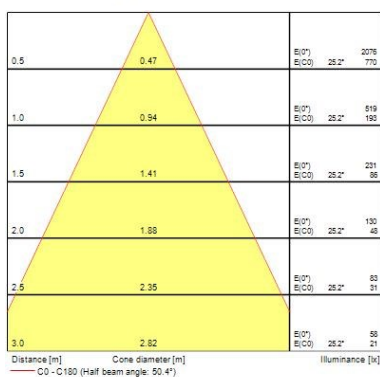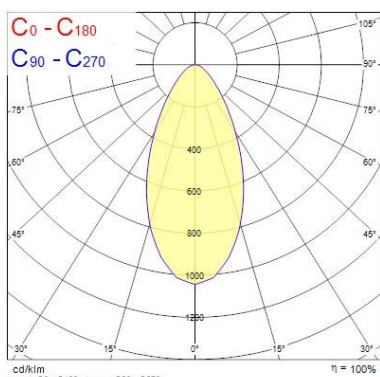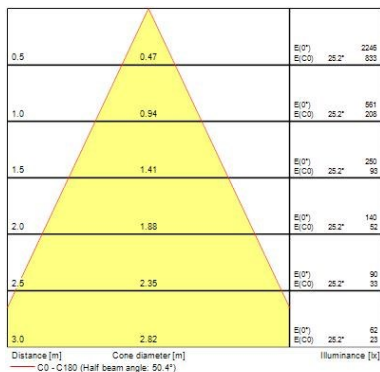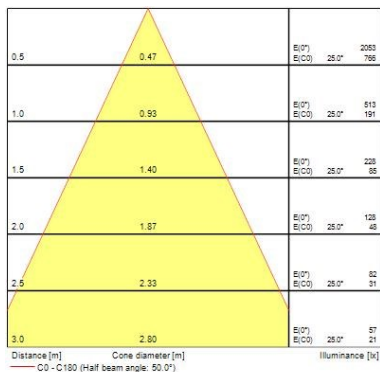

TECHNICAL DRAWINGS

