


Start Bollard L IP65
START Bollard L IP65 1100lm 840 BLK
0047943



Product features

- Integrated LED bollard, contemporary design on a classic bollard, 1100LM, 26W, 42lm/W, 4000K, Electronic driver, Driver Current: 1200mA, CRI80, IP65, Ik10, 50,000hrs (L70), (HxWxD) 1000x168x168mm, 5 step MacAdam ellipse, 6.5kg, RAL 9005, Class 1, 220-240V, energy class: A++, A+, A

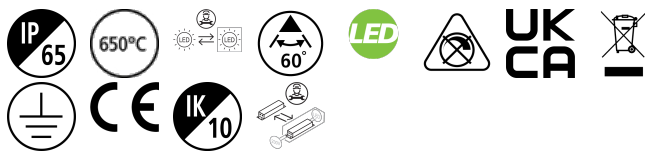


PRODUCT OVERVIEW

Product name	START Bollard L IP65 1100lm 840 BLK
Technology	LED
Environment	External
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC000301
E-number FI	4579444
Warranty	5 years
Fixture luminous flux (lm)	1100
Luminaire efficacy (lm/W)	42
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	60
Photobiological Risk Group	RG1
Total power consumption (W)	26
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9005 - Jet black
IP rating	IP65
IK rating	IK10
Product EAN number	5410288479439

Start Bollard L IP65
START Bollard L IP65 1100lm 840 BLK
0047943

PHOTOMETRY

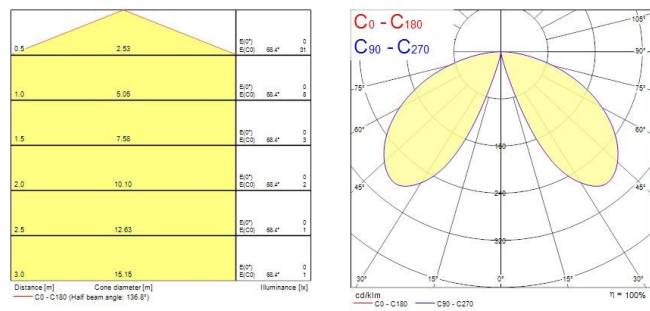

TECHNICAL DRAWINGS

