

Inverto Pend Rmt NW 1-10v White 3080066



Features

- Pendant luminaire with remote driver, wire to base with pluggable connection for easy installation, suitable for looping, switchable driver, white coloured aluminium housing, 1,617lm, 16W, 101lm/W, 4000K, 350mA , CRI:80, 40° beam Angle, 1-10V dimmable, IP20, IK07, lifespan: 60,000hrs (L80:B20), 18.50x24.5x11.5mm.


Product Overview

Product name	Inverto Pend Rmt NW 1-10v White
Technology	LED
Housing	Aluminium
Mount	Pendant surface
Environment	Internal
General application	Hospitality
ETIM Class	EC001743
Fixture luminous flux (lm)	1617
Luminaire efficacy (lm/W)	101
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	40
Photobiological Risk Group	RG1
Total power consumption (W)	16
Electrical protection	Class II
Control gear type	Electronic ballast

Inverto Pend Rmt NW 1-10v White 3080066

Dimmable	Yes
Minimum dimming level (%)	5
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	8711971800668
Warranty	5 years
Dimming method	1-10V (Analogue)

Photometry

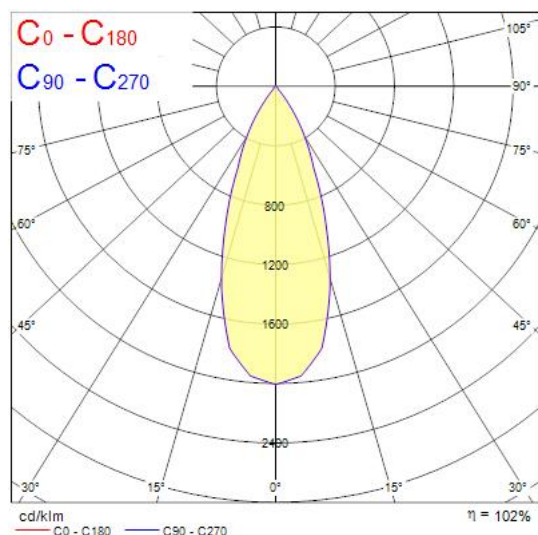

Technical drawings

