



Features

- Surface Ceiling mounted luminaire, wire to base with pluggable connection for easy installation, suitable for looping, rust coloured aluminium housing, 1,617lm, 16W, 101lm/W, 4000K, 350mA , CRI:80, 40° beam Angle, non-dimmable, IP65, IK07, lifespan: 60,000hrs (L80:B20), 110 x 110 x 162 mm.


Product Overview

Product name	Inverso Surface NW Eb Rust
Technology	LED
Housing	Aluminium
Mount	Ceiling surface mounting
Environment	Internal/External
General application	Hospitality
ETIM Class	EC002892
E-number FI	4579346
Fixture luminous flux (lm)	1617
Luminaire efficacy (lm/W)	101
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	40
Photobiological Risk Group	RG1
Total power consumption (W)	16
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	No
IP rating	IP65

Inverto Surface NW Eb Rust
3081076

IK rating	IK07
Product EAN number	8711971810766
Warranty	5 years
Dimming method	N/A

Photometry

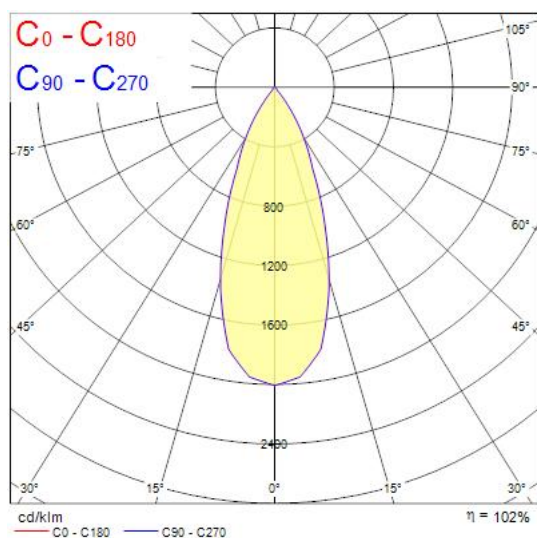

Technical drawings

