









Features


• SylSafe Bay RT C EM3 NM MS is a dust and waterproof surface mounted emergency luminaire for industrial applications. Escape route optics for standard mounting heights <4m. Non-maintained 3hr emergency duration with NiMH rechargeable battery. Recharge period 24 hours. 200lm, 3W, IK03, IP65. Power Factor 0.44. Class II electrical construction.

Product Overview


| Product name | SylSafe Bay RT C EM3 NM MS |
|--------------------------------|---|
| Technology | LED |
| Туре | LED |
| Mount | Ceiling surface mounting |
| General application | Office, Hospitality, Retail, Museums & Galleries, Education, Logistics & Industry |
| ETIM Class | EC001957 |
| Fixture luminous flux (lm) | 200 |
| Luminaire efficacy (lm/W) | 67 |
| Colour temperature (K) | 5700 |
| CRI (Ra) | 75 |
| Photobiological Risk Group | RG1 |
| Luminous flux (emergency) (lm) | 200 |
| Electrical protection | Class II |
| Housing colour | White |
| IP rating | IP65 |
| IK rating | IK03 |
| Product EAN number | 5410288417417 |
| Warranty | 5 years |



Photometry

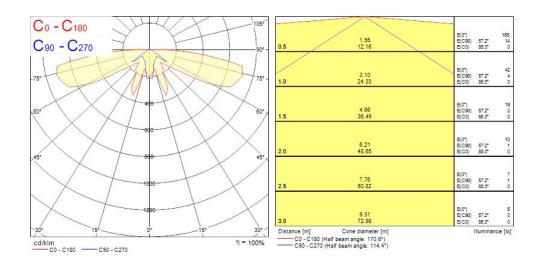

Technical drawings



Data table

GENERAL DATA

Product name

SylSafe Bay RT C EM3 NM MS



| Technology | LED |
|---------------------|---|
| Туре | LED |
| Mount | Ceiling surface mounting |
| General application | Office, Hospitality, Retail, Museums & Galleries, |
| | Education, Logistics & Industry |
| ETIM Class | EC001957 |
| Warranty | 5 years |

OPTICAL DATA

| Fixture luminous flux (lm) | 200 |
|--------------------------------|------|
| Luminaire efficacy (lm/W) | 67 |
| Colour temperature (K) | 5700 |
| CRI (Ra) | 75 |
| Photobiological Risk Group | RG1 |
| Luminous flux (emergency) (lm) | 200 |
| Emergency duration (h) | 3 |

ELECTRICAL DATA

| Mains voltage (V) | 230-240V |
|------------------------|----------|
| Lamp power factor | 0.44 |
| Electrical protection | Class II |
| Control gear required | Yes |
| Drive current (mA) | 30 |
| Nominal Frequency (Hz) | 50/60Hz |

PHYSICAL DATA

| Housing colour | White |
|-----------------------------|-------|
| IP rating | IP65 |
| IK rating | IK03 |
| Nominal Product Length (mm) | 197 |
| Nominal Product Width (mm) | 197 |
| Nominal Product Height (mm) | 53 |
| Weight (kg) | 0.588 |



PACKAGING

| Single packaging type | Carton |
|---------------------------------------|----------------|
| Product EAN number | 5410288417417 |
| Packaging single length / height (cm) | 23.0 |
| Packaging single width (cm) | 15.0 |
| Packaging single depth (cm) | 7.0 |
| DUN14 (outer) | 05410288417417 |
| Units per outer package | 5 |
| Packaging outer length / height (cm) | 42.2 |
| Packaging outer width (cm) | 25.2 |
| Packaging outer depth (cm) | 13.2 |

SAFETY DATA

| Special purpose lamp | No |
|-------------------------------------|----|
| Dry applications use only | No |
| Suitable for household illumination | No |