

Start Spot 550lm 3CCT DIM IP44 WH
0005509



Features

- Integrated LED recessed spotlight, vertical tilt 30°, phase dimmable, 3 CCT 2700K-3000K-4000K, 38° degree beam angle, polycarbonate white body, IP44 from the front, IK03, loop-in/loop-out terminals for fast wiring, 87mm bezel diameter, 68-74mm cutout, clear lens. Additional silver or black bezel can be ordered as accessory.


Product Overview

Product name	Start Spot 550lm 3CCT DIM IP44 WH
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
General application	Hospitality, Residential & Consumer, Retail
ETIM Class	EC001744
E-number FI	4278483
Fixture luminous flux (lm)	550
Luminous flux (lm)	550
Luminaire efficacy (lm/W)	100
Colour temperature (K)	3000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	38
Photobiological Risk Group	RG1
Total power consumption (W)	5.5
Electrical protection	Class II
Control gear type	LED driver constant current

Start Spot 550lm 3CCT DIM IP44 WH
0005509

Dimmable	Yes
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL9003
IP rating	IP44/20
IK rating	IK03
Product EAN number	5410288055091
Warranty	3 years
Dimming method	Mains: leading / trailing edge

Photometry

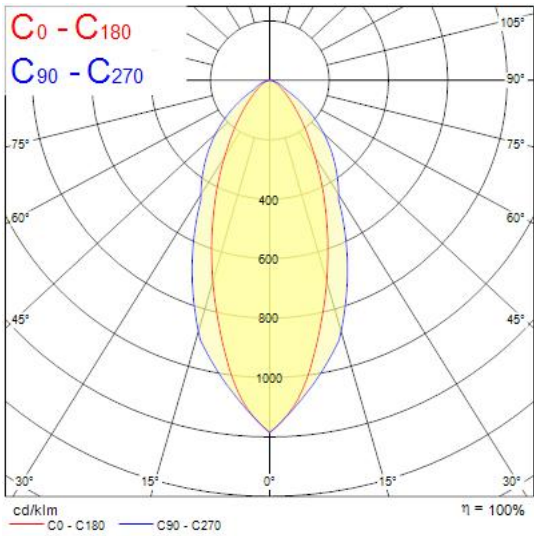

Technical drawings

