

RTS 1500MM 70W 5-WIRE DOUBLE ASYM WHITE  
0042584




Features

• RTS LED linear luminaire for industrial and commercial applications. 1500 mm lenght with double asymmetrical optics provide homogenous light distribution for wide, shelf areas. Steel housing, White color, -25 ... +30 °C operating temperature range, 4000 K, CRI 80, 3 SDMC. 70 W power consumption, 11200 lm luminous flux, 160 lm/W efficacy, 1500 mm x 70.2 mm x 78.6 mm (L x W x H) dimensions, IP20, IK03, 220-240 V 50/60 Hz, Class I. Lifespan L70:B50 120,000 hours.


Product Overview

|                                 |                                         |
|---------------------------------|-----------------------------------------|
| Product name                    | RTS 1500MM 70W 5-WIRE DOUBLE ASYM WHITE |
| Technology                      | LED                                     |
| Housing                         | Steel                                   |
| General application             | Logistics & Industry                    |
| ETIM Class                      | EC000986                                |
| Fixture luminous flux (lm)      | 11200                                   |
| Luminaire efficacy (lm/W)       | 160                                     |
| Colour temperature (K)          | 4000                                    |
| CRI (Ra)                        | 80                                      |
| Colour Variation Initial (SDCM) | 3                                       |
| Photobiological Risk Group      | RG1                                     |
| Total power consumption (W)     | 70                                      |
| Electrical protection           | Class I                                 |
| Dimmable                        | No                                      |
| LED Flickering Rate             | Ultra low (5% or less)                  |
| Housing colour                  | White                                   |
| IP rating                       | IP20                                    |
| IK rating                       | IK03                                    |
| Product EAN number              | 5410288425849                           |
| Warranty                        | 5 years                                 |
| Dimming method                  | N/A                                     |

Photometry

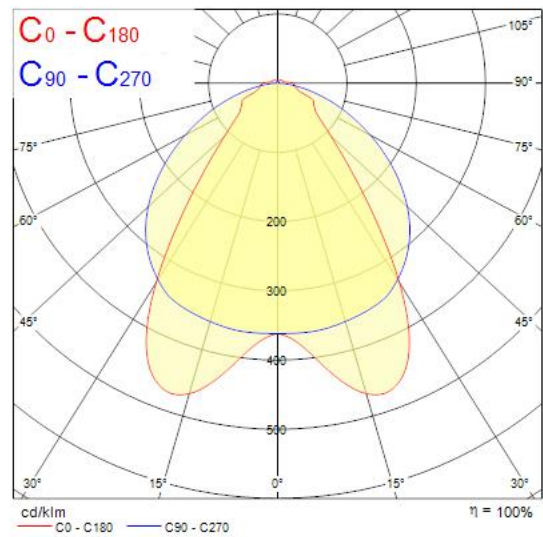

Technical drawings

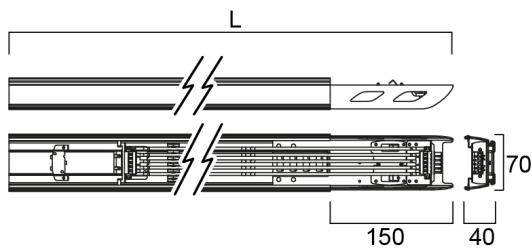

|   |     |     |      |      |      |      |      |      |
|---|-----|-----|------|------|------|------|------|------|
| L | 600 | 900 | 1202 | 1500 | 2403 | 3000 | 3605 | 4500 |
|---|-----|-----|------|------|------|------|------|------|