

Features

- START Downlight 5in1 is an integrated LED recessed / surface mounted downlight with built in non dimmable driver. Colour temperature (3000K, 4000K and 6500K) can be adjusted by a 3-way switch located on the back of the fixture. Adaptability to various cut-outs from 50mm to 125mm.


Product Overview

| | |
|---------------------------------|---|
| Product name | START Downlight 5IN1 50-125 600LM |
| Technology | LED |
| Cap/Base | N/A |
| Housing | PC Polycarbonate |
| Mount | Ceiling recessed mounting, Ceiling surface mounting |
| General application | Residential & Consumer |
| ETIM Class | EC001744 |
| E-number FI | 4278424 |
| Fixture luminous flux (lm) | 600 |
| Luminaire efficacy (lm/W) | 100 |
| Colour temperature (K) | 4000 |
| Light colour | N/A |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 6 |
| Beam Angle (°) | 110 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 6 |
| Electrical protection | Class II |
| Control gear type | LED driver constant current |
| Dimmable | No |
| LED Flickering Rate | Low (6% - 20%) |

START Downlight 5IN1 50-125 600LM 0053147

| | |
|--------------------|---------------|
| Housing colour | RAL9003 |
| IP rating | IP20 |
| IK rating | IK05 |
| Product EAN number | 5410288531472 |
| Warranty | 3 years |
| Dimming method | N/A |

Photometry

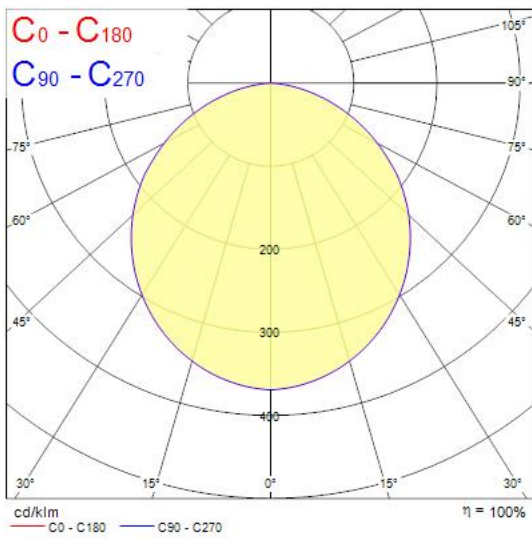

Technical drawings

